



REVISIONS				
ECN	REV.	DESCRIPTION	DATE	APPROVED
1256	A	FIRST RELEASE with UL2017	2024/10/07	XY

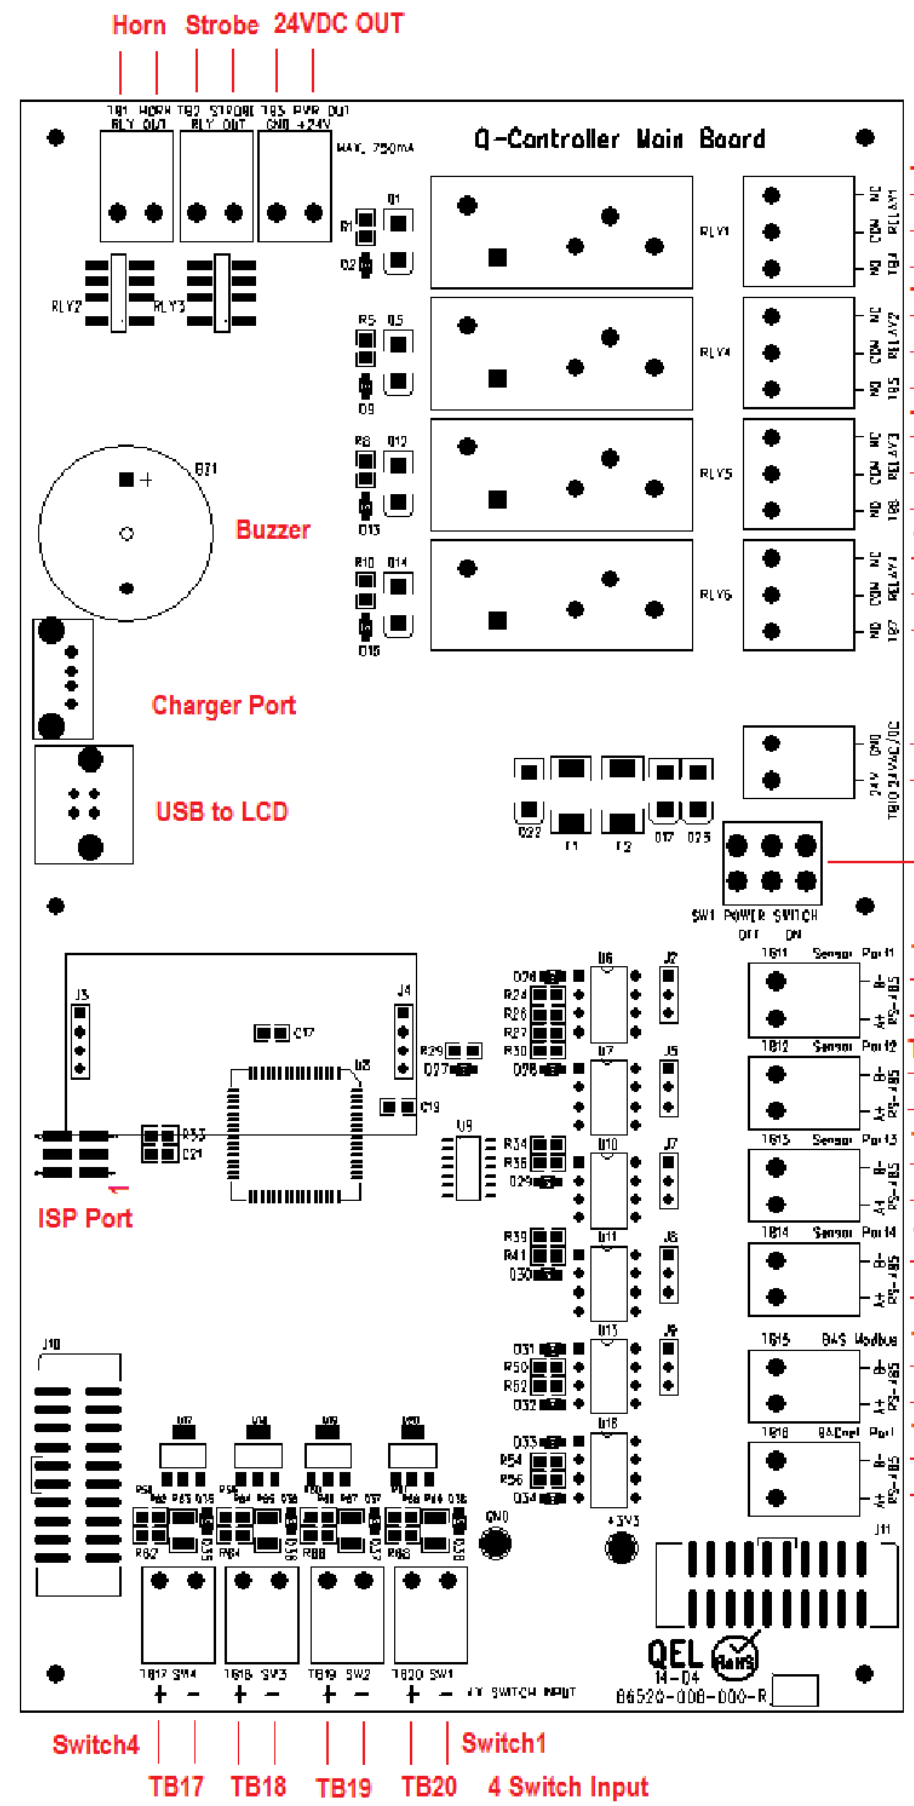

- 4 Relay Output**
- TB4 Relay1**
 NO: Normally Open
 NC: Normally Closed
 COM: Common
- TB5 Relay2**
 NC: Normally Closed
 COM: Common
 NO: Normally Open
- TB6 Relay3**
 NC: Normally Closed
 COM: Common
 NO: Normally Open
- TB7 Relay4**
 NC: Normally Closed
 COM: Common
 NO: Normally Open
- TB10 24VAC Power In**
 24VDC
- 4 RS-485 Ports for Remote Device**
- TB11 B-**
- TB11 A+**
- TB12 B-**
- TB12 A+**
- TB13 B-**
- TB13 A+**
- TB14 B-**
- TB14 A+**
- TB15 RS-485 Modbus**
 B-
 A+
- TB16 RS-485 for BACnet/IP Module**
 B-
 A+

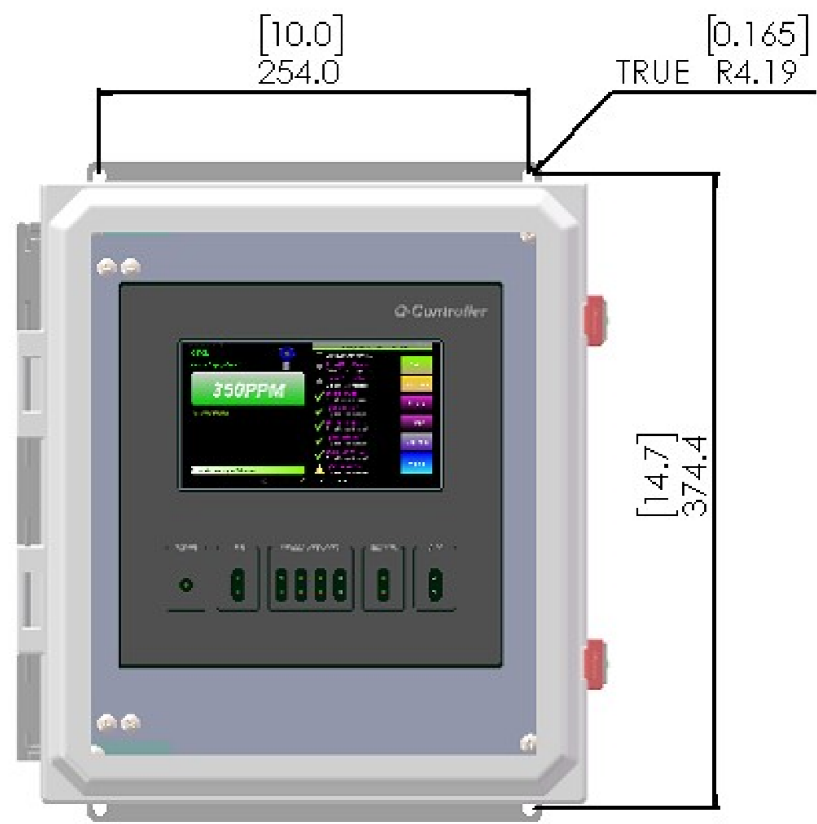

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QUATROSENSE ENVIRONMENTAL LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF QUATROSENSE ENVIRONMENTAL LTD IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	Greystone Energy System Inc.
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±		XY	24/10/07	
INTERPRET GEOMETRIC TOLERANCING PER:		DRAWN		TITLE: Q-Controller, GES Installation Drawing
MATERIAL		CHECKED		
FINISH		ENG APPR.		
NEXT ASSY USED ON		MFG APPR.		
APPLICATION		COMMENTS:		SIZE DWG. NO. REV B 86550-002-005 A
DO NOT SCALE DRAWING		SCALE: 1:4 WEIGHT:		SHEET 1 OF 7

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
-	-	See Sheet1	-	-

Specification:

Power Supply	<p>Voltage: 24VDC nominal, range 18 to 30VDC 24VAC nominal, range 15 to 24VAC 50/60HZ</p> <p>Note: Input Power is half-wave rectifier circuit, it can be either floating or grounded. You will damage devices if you mix half wave and full wave rectifiers on the same AC source. Use extreme caution when sharing a common AC source. Sharing a common DC source is less problematic.</p> <p>Current: Q-Controller: max. 0.75 A (fuse protected) Strobe & Horn: max. 0.75 A (fuse protected)</p> <p>Total actual power is dependent on the system design. The power may be supplied to sensors and modules or each may have separate power supplies. Each type of sensor varies in its power requirements.</p> <p>Note: No external over-current protection is required. Over-current protection is provided by means of fuses F1 and F2. See fuse specification below.</p>
Fuse	<p>F1, F2 on Main Board: Polyswitch 750mA</p> <p>Polyswitch device resets after the fault is cleared and power to the circuit is removed</p>
Power Switch	<p>Slide switch on circuit card (SW1). This switch disconnects power to the main circuit cards and LCD display.</p> <p>NOTICE: A switch or circuit breaker must be provided in the installation, which can remove power from the Q-Controller in case of emergency or any other related requirement.</p> <p>Since the Q-Controller enclosure can be locked to prevent unwanted tampering, the internal power switch is not guaranteed to be accessible.</p> <p>Feeding the Q-Controller power from a rack main switch or from a switch in a distribution box is adequate.</p>

Enclosure	<p>UL 508 Type 1, 2, 3, 4, 4X, 12 and 13 CSA Type 1, 2, 3, 4, 4X, 12 and 13 NEMA Type 1, 2, 3, 4, 4X, 12 and 13 IEC 60529, IP66 Flammability V-O per UL 94 UV rating (f1) per UL746C</p>
Environmental conditions	<p>Location: Indoor use only Altitude: Up to 2 000 m Temperature: 0 °C to 49 °C Relative Humidity: 85±5% for temperatures up to 31 °C decreasing linearly to 50 % at 40 °C. Pollution Degree: 3, in accordance with IEC 664. Installation Categories (Overvoltage Categories) II</p>
Display & Keypad	<p>7 inch LCD touchscreen display delivers 800 x 480 resolution and offers a capacitive multi-touch TN panel for easily navigate screen</p>
Panel Indicators	<p>15 Status LEDs Power Status USB TX/RX status 4 RS-485 port TX/RX Status for Sensor Network 1 RS-485 port TX/RX Status for Modbus 1 RS-485 port TX/RX Status for BACnet Module or AUX</p>
On-Board Relays	<p>4 pluggable Relays SPDT, Dry contacts</p> <p>Resistive load: 10A at 250VAC 10A at 30VDC</p> <p>Inductive load: 7.5A at 250VAC 5A at 30VDC</p>

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QUATROSENSE ENVIRONMENTAL LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF QUATROSENSE ENVIRONMENTAL LTD IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	Greystone Energy System Inc.
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±		DRAWN		
INTERPRET GEOMETRIC TOLERANCING PER:		CHECKED		SIZE DWG. NO. REV B 86550-002-005 A
MATERIAL		ENG APPR.		
NEXT ASSY	USED ON	MFG APPR.		
APPLICATION		Q.A.		
DO NOT SCALE DRAWING		COMMENTS:		

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
-	-	See Sheet1	-	-

NOTE: Input Power is half-wave rectifier circuit, it can be either non-grounded or grounded. You will damage devices if you mix half wave and full wave rectifiers on the same AC source. Use extreme caution when sharing a common AC source. Sharing a common DC source is less problematic.

Power Supply General Guideline:

- Q-Controller uses half-wave rectifier only
- Q5 TB5 is half-wave rectifier
- Q8 TB6 is half-wave rectifier
- All I/O boxes are half-wave rectifier
- It is okay to connect multiple devices to the same AC transformer and share signal commons if
 - Every device uses a half-wave rectifier
 - And the same AC lead on every device is used for common
- If the power supply is 24VAC, no matter it is GROUNDED (one side of AC is connected to ground), or FLOATING (neither side of AC is connected to ground), the polarization is important, make sure the Neutral or the same AC lead is connected to the GND of TB10. Make sure the same AC lead is connected to ground in all devices that share the AC source. Treat AC like DC for purposes of watching polarity in this case.
 - For Q5, the TB5 of Q5 can only be connected to the same AC source
 - For Q8, the TB6 of Q8 can only be connected to the same AC source
 - For I/O boxes, they can be directly connected to the same AC source
 - For other devices, only the device with half-wave rectifier can be connected to the same AC source. If it doesn't have, or any doubt exists, provide a dedicated isolated transformer to the device
- If the power supply is 24VDC, all the devices can be powered by the same DC source.
- Whenever you have different devices from different manufacturers, be careful to separate those devices that utilize a Full-wave rectifier from those using a Half-wave rectifier. When any doubt exists, provide a separate transformer. The small expense of an additional transformer or two will more than make up for all of the time and money spent on troubleshooting
- It is necessary to bear in mind the actual installation when sizing the transformer. The installation requirements can run theoretically from only 15 VA to over 200 VA. These systems ranging from a single controller, a few electrochemical sensors to a full 128 Combustible sensors with several remote relay modules.
- It is always best to allow some safety margin in designing power supplies, and 25% to 50% allowance for startup surges and future requirements is recommended.

QEL supplies one standard transformer



M-Transformer 120 to 24 VAC 200 VA

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QUATROSENSE ENVIRONMENTAL LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF QUATROSENSE ENVIRONMENTAL LTD IS PROHIBITED.

On-Board Switch Inputs:	4 channel switch inputs The switch can be Q-Switch or any ON-OFF switch
On-Board Buzzer	Used for internal warning and alarm, 3700 Hz Continuous It's not used for Alarm-Sounding Appliance. For external Alarm-Sounding Appliance, they can be connected to the below Horn/Strobe terminal blocks, the Alarm-Sounding Appliance sound-pressure level should be at least 85dB at 10 feet according standard UL2017 Audibility Test
Horn & Strobe	Two relay dry contact are for Horn and Strobe Dedicated 24VDC terminals are supplied for connection to standard strobe and horn set. Maximum of 750mA on the 24VDC power supply
Remote Devices	4x RS-485 Ports with QEL Controller Protocol - Available transmitter: Q5, Q8, QIRF... - Available I/O box: 8CH-AI-Box, 8CH-AO-Box, 4CH-BI-Box, 4CH-Relay-Box
Modbus Slave Port	RS-485 port Responds as a Modbus Slave using RTU protocol. Q-Controller supplies read status information only
BACnet Port	RS-485 port Connect to QEL BACnet/IP module
Certification	UL2017 Standard for Safety General-Purpose Signaling Device and Systems Project#: G103011776 for Canada, G103014445 for US For details, contact QEL. Tested with QEL gas transmitter Q5C and IO-Box QEL Q5C is certified with UL2075 Standard for Safety


		UNLESS OTHERWISE SPECIFIED:	NAME	DATE	Greystone Energy System Inc.	
		DIMENSIONS ARE IN INCHES	DRAWN		TITLE:	
		TOLERANCES:	CHECKED		Q-Controller, GES	
		FRACTIONAL ±	ENG APPR.		Installation Drawing	
		ANGULAR: MACH ± BEND ±	MFG APPR.		SIZE	DWG. NO.
		TWO PLACE DECIMAL ±	Q.A.		B	86550-002-005
		THREE PLACE DECIMAL ±	COMMENTS:		REV	A
		INTERPRET GEOMETRIC TOLERANCING PER:			SCALE: 1:4	1
NEXT ASSY	USED ON	MATERIAL			SHEET 3 OF 7	
		FINISH				
APPLICATION		DO NOT SCALE DRAWING				

8 7 6 5 4 3 2 1

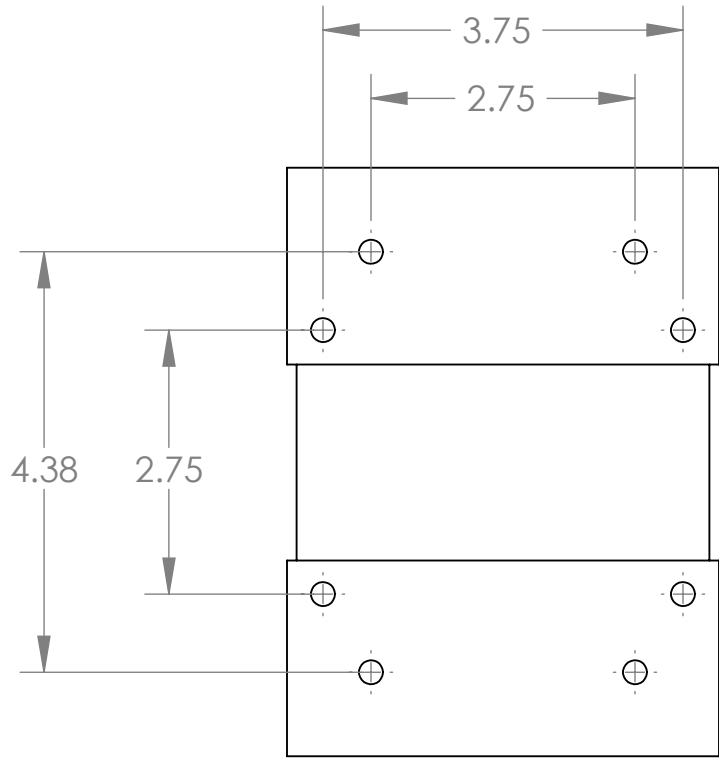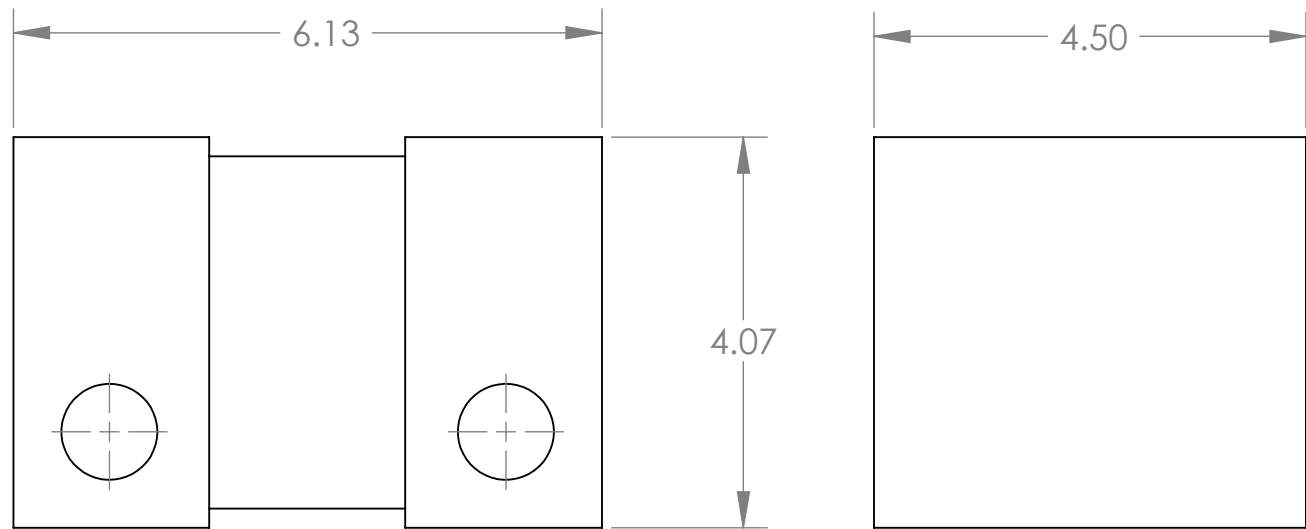

BOTTOM VIEW MOUNTING HOLES

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
-	-	See Sheet1	-	-

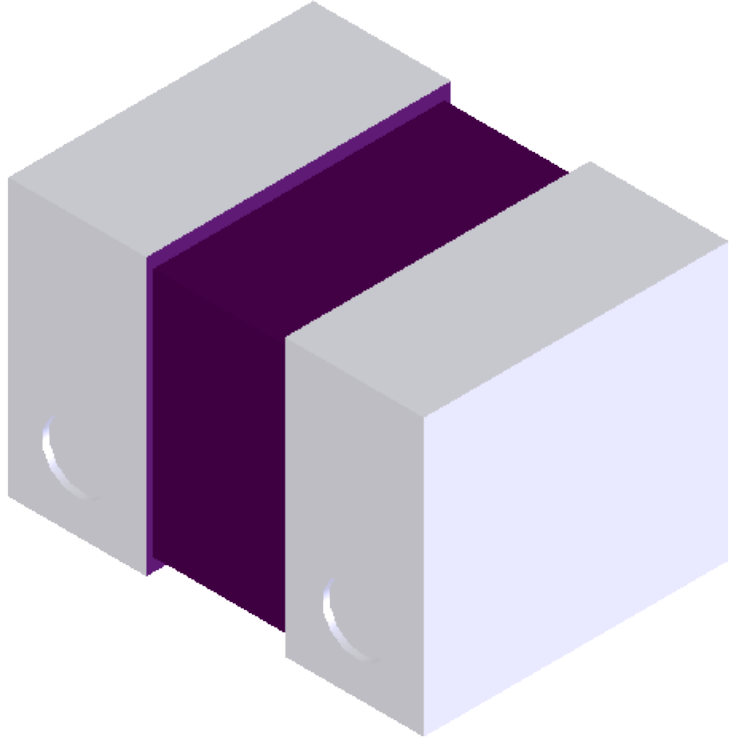

QEL M-TRANSFORMER DIMENSIONS AND SPECIFICATIONS

NOTE:
INDOOR TYPE ENCLOSED TRANSFORMER

PRIMARY 120VAC 60Hz
SECONDARY 24VAC
POWER 250VA


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QUATROSENSE ENVIRONMENTAL LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF QUATROSENSE ENVIRONMENTAL LTD IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME		DATE		Greystone Energy System Inc.	
		DIMENSIONS ARE IN INCHES		DRAWN				TITLE:	
		TOLERANCES:		CHECKED				Q-Controller, GES	
		FRACTIONAL ±		ENG APPR.				Installation Drawing	
		ANGULAR: MACH ± BEND ±		MFG APPR.				SIZE DWG. NO. REV	
		TWO PLACE DECIMAL ±		Q.A.				B 86550-002-005 A	
		THREE PLACE DECIMAL ±		COMMENTS:				SCALE: 1:1 1 SHEET 4 OF 7	
		INTERPRET GEOMETRIC TOLERANCING PER:							
		MATERIAL							
NEXT ASSY		USED ON		FINISH					
APPLICATION				DO NOT SCALE DRAWING					

8 7 6 5 4 3 2 1

Recommend Connection for New Installations

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
-	-	See Sheet1	-	-

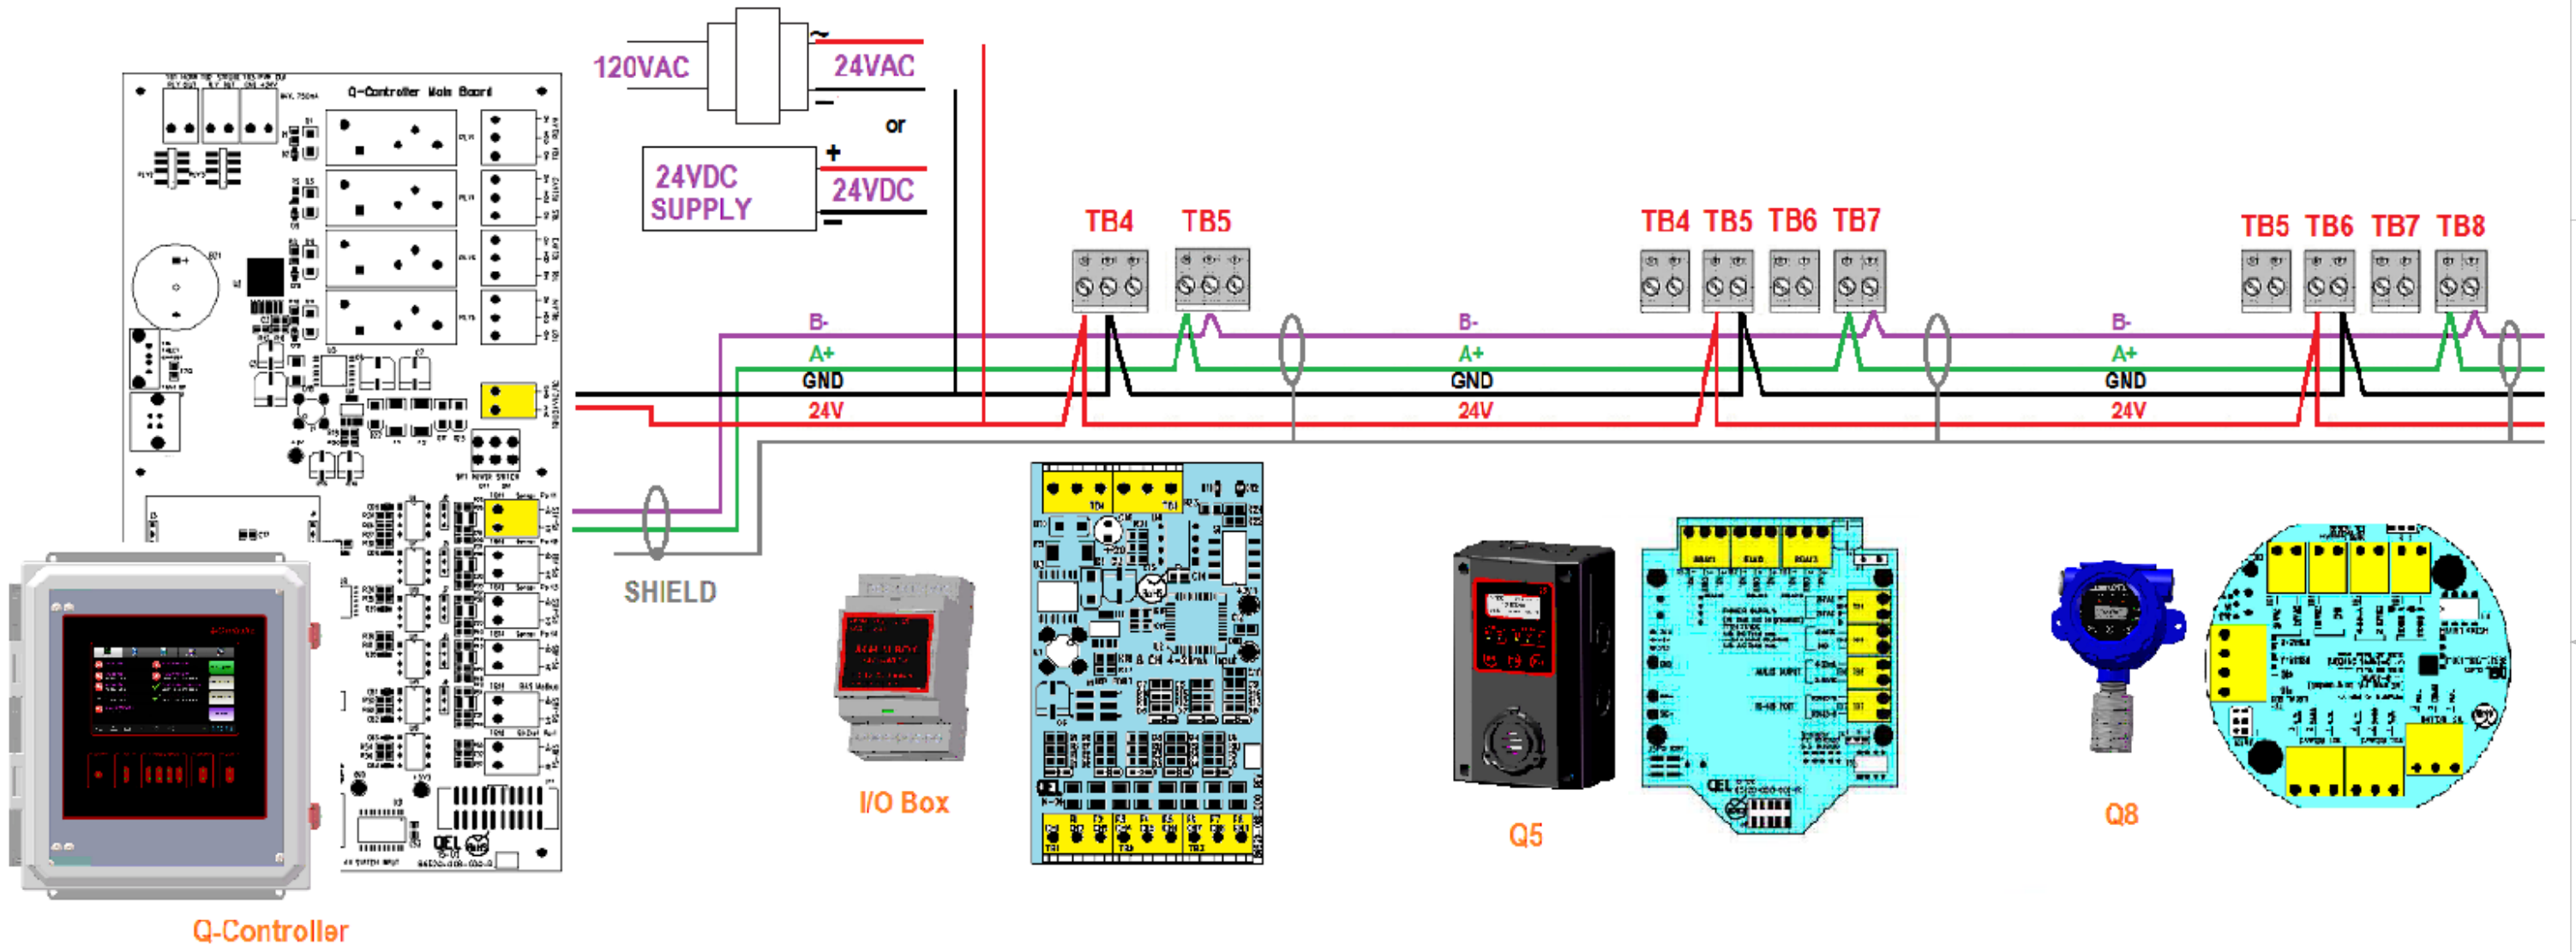


- Note:
1. The power supply can be 24VAC or DC as every device uses a half-wave rectifier in the drawing
 2. The power negative may be grounded or floating
 3. Don't mix full wave rectifiers device with this system
 4. RS-485 cable should be wired from one sensor to another without tees or stub. Power cable does not matter
 5. Before power up, the polarity of the 24VAC power supply should be checked carefully, reversing polarity on the network will cause the RS-485 driver chips to blow up

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QUATROSENSE ENVIRONMENTAL LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF QUATROSENSE ENVIRONMENTAL LTD IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	Greystone Energy System Inc.	
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±		DRAWN			
INTERPRET GEOMETRIC TOLERANCING PER:		ENG APPR.		SIZE	DWG. NO.
MATERIAL		MFG APPR.		B	86550-002-005
FINISH		Q.A.		REV	A
NEXT ASSY	USED ON	COMMENTS:		SCALE: 1:4	1
APPLICATION	DO NOT SCALE DRAWING			SHEET 5 OF 7	

AI-BOX Connection

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
-	-	See Sheet1	-	-

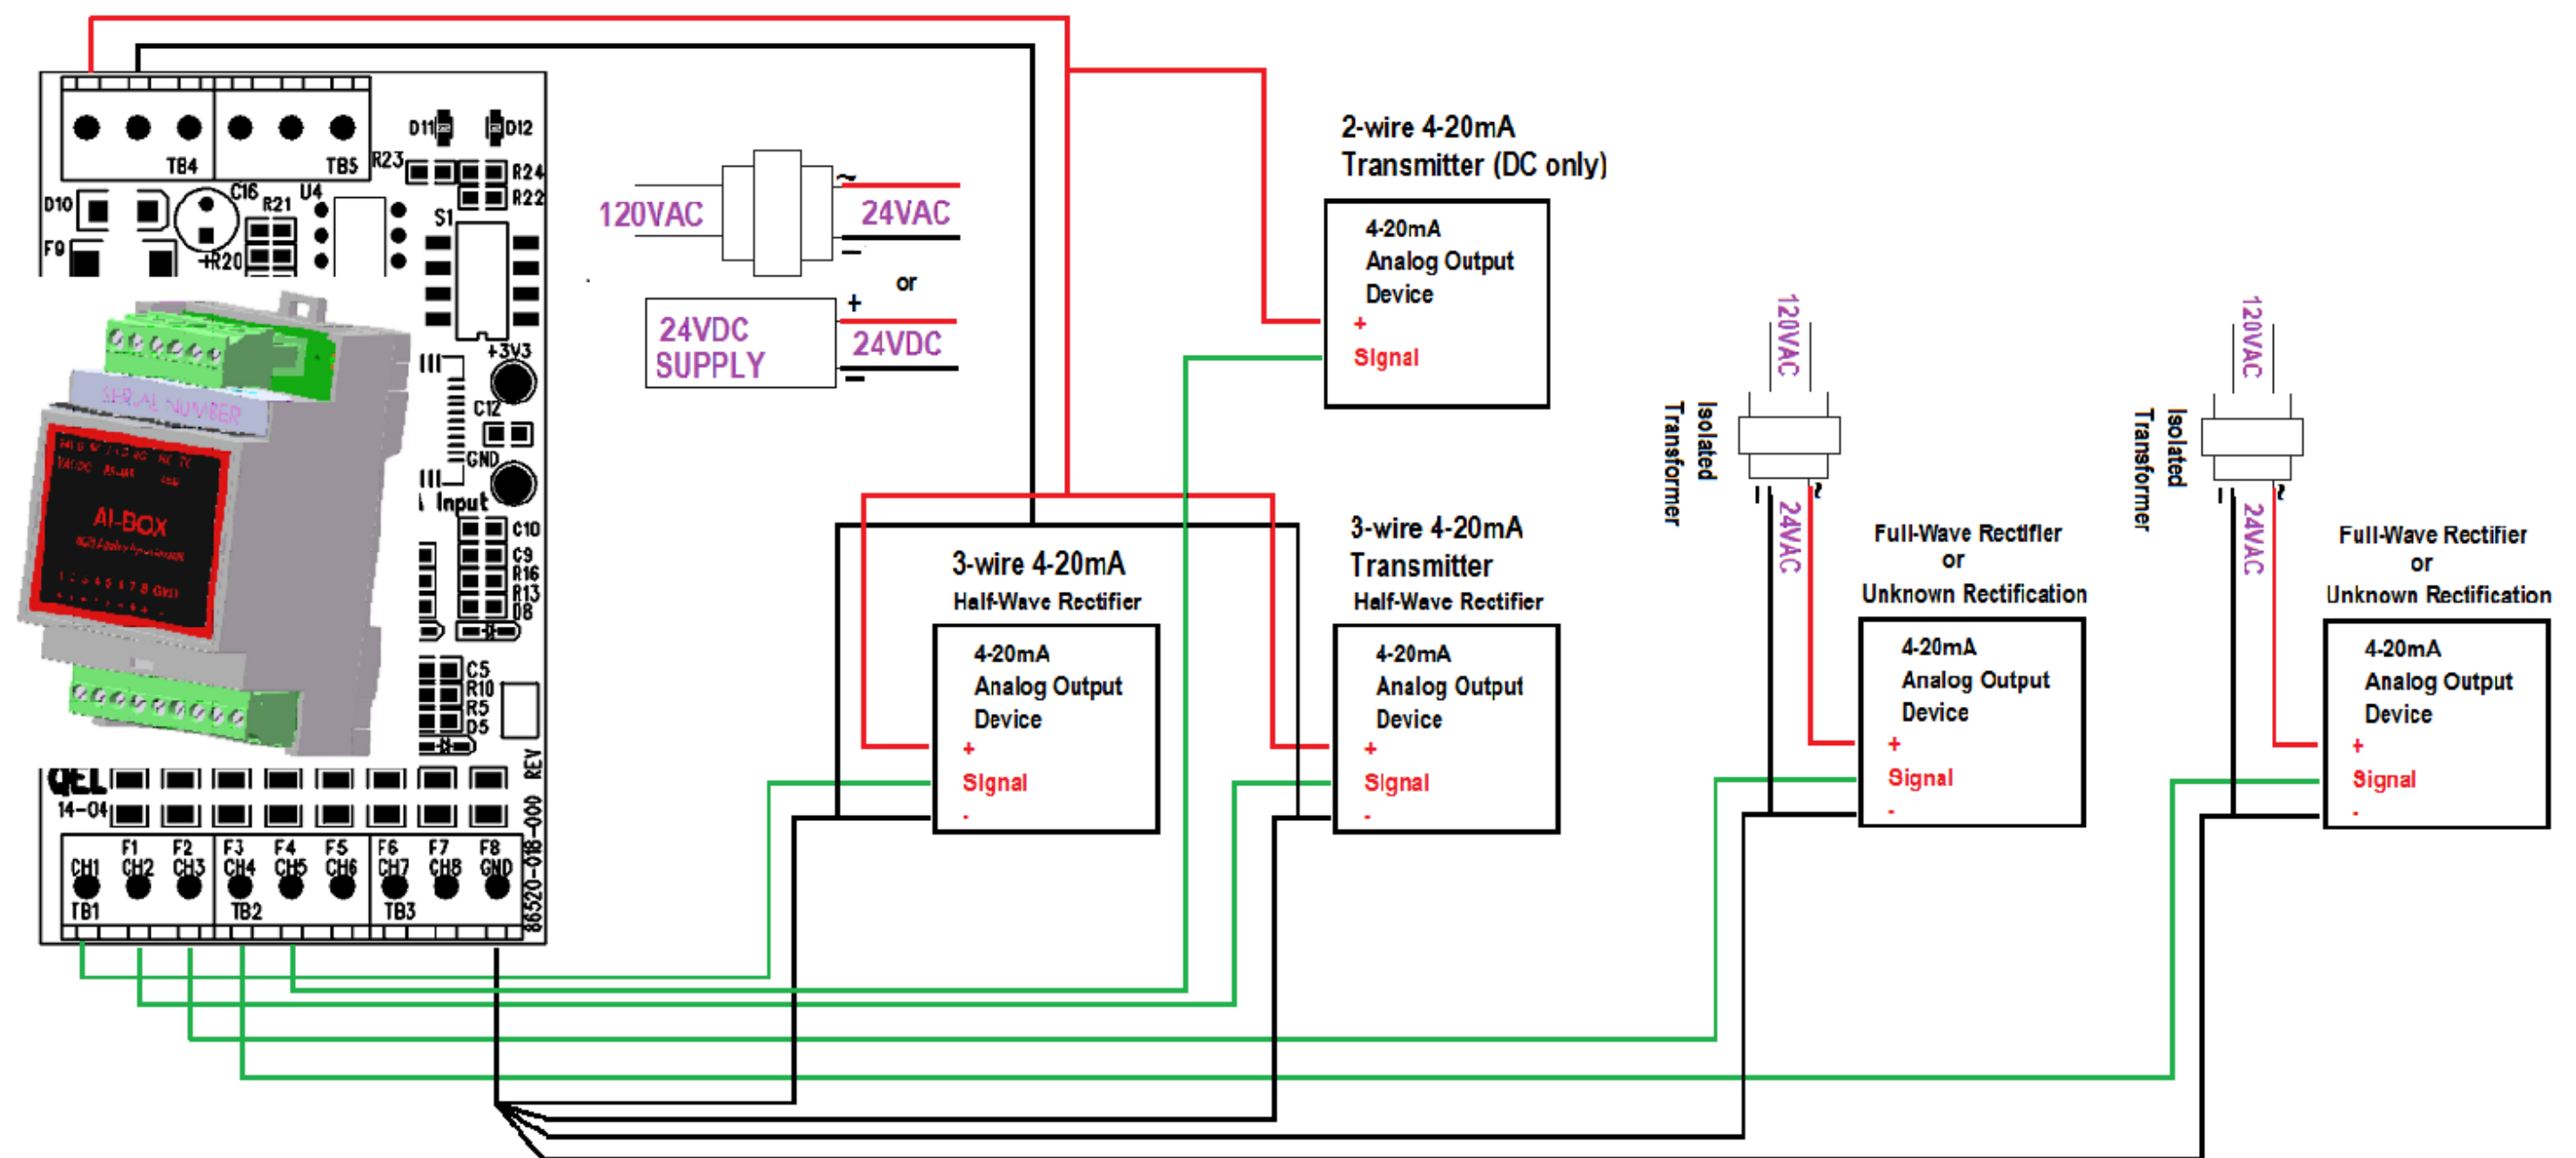

NOTE for AI-Box and AO-Box:


- All I/O boxes are non-isolated devices with a half-wave rectifier on the 24VAC/DC power input terminal. Therefore, to prevent equipment damage, multiple devices that are powered by a common 24VAC transformer must use common device power connections (e.g. 24VAC input power to other device power inputs, and ground to other device grounds), or dedicated isolated transformers must be provided for each non-isolated device.
- The AI-Box 24VAC/DC input power ground and analog input signal returns are common.
- The AO-Box 24VAC/DC input power ground and analog output signal returns are common.
- If it is known that the connected analog device is half-wave rectified, it can share the same AC power supply with the AI-Box and AO-Box.
- If the rectification of the other device is unknown, it is recommended that a separate transformer is used to power other device.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	Greystone Energy System Inc.
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±		DRAWN		
INTERPRET GEOMETRIC TOLERANCING PER:		CHECKED		SIZE DWG. NO. REV B 86550-002-005 A
MATERIAL		ENG APPR.		
FINISH		MFG APPR.		
NEXT ASSY	USED ON	Q.A.		
APPLICATION		COMMENTS:		
DO NOT SCALE DRAWING				

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
-	-	See Sheet1	-	-

AO-BOX Connection

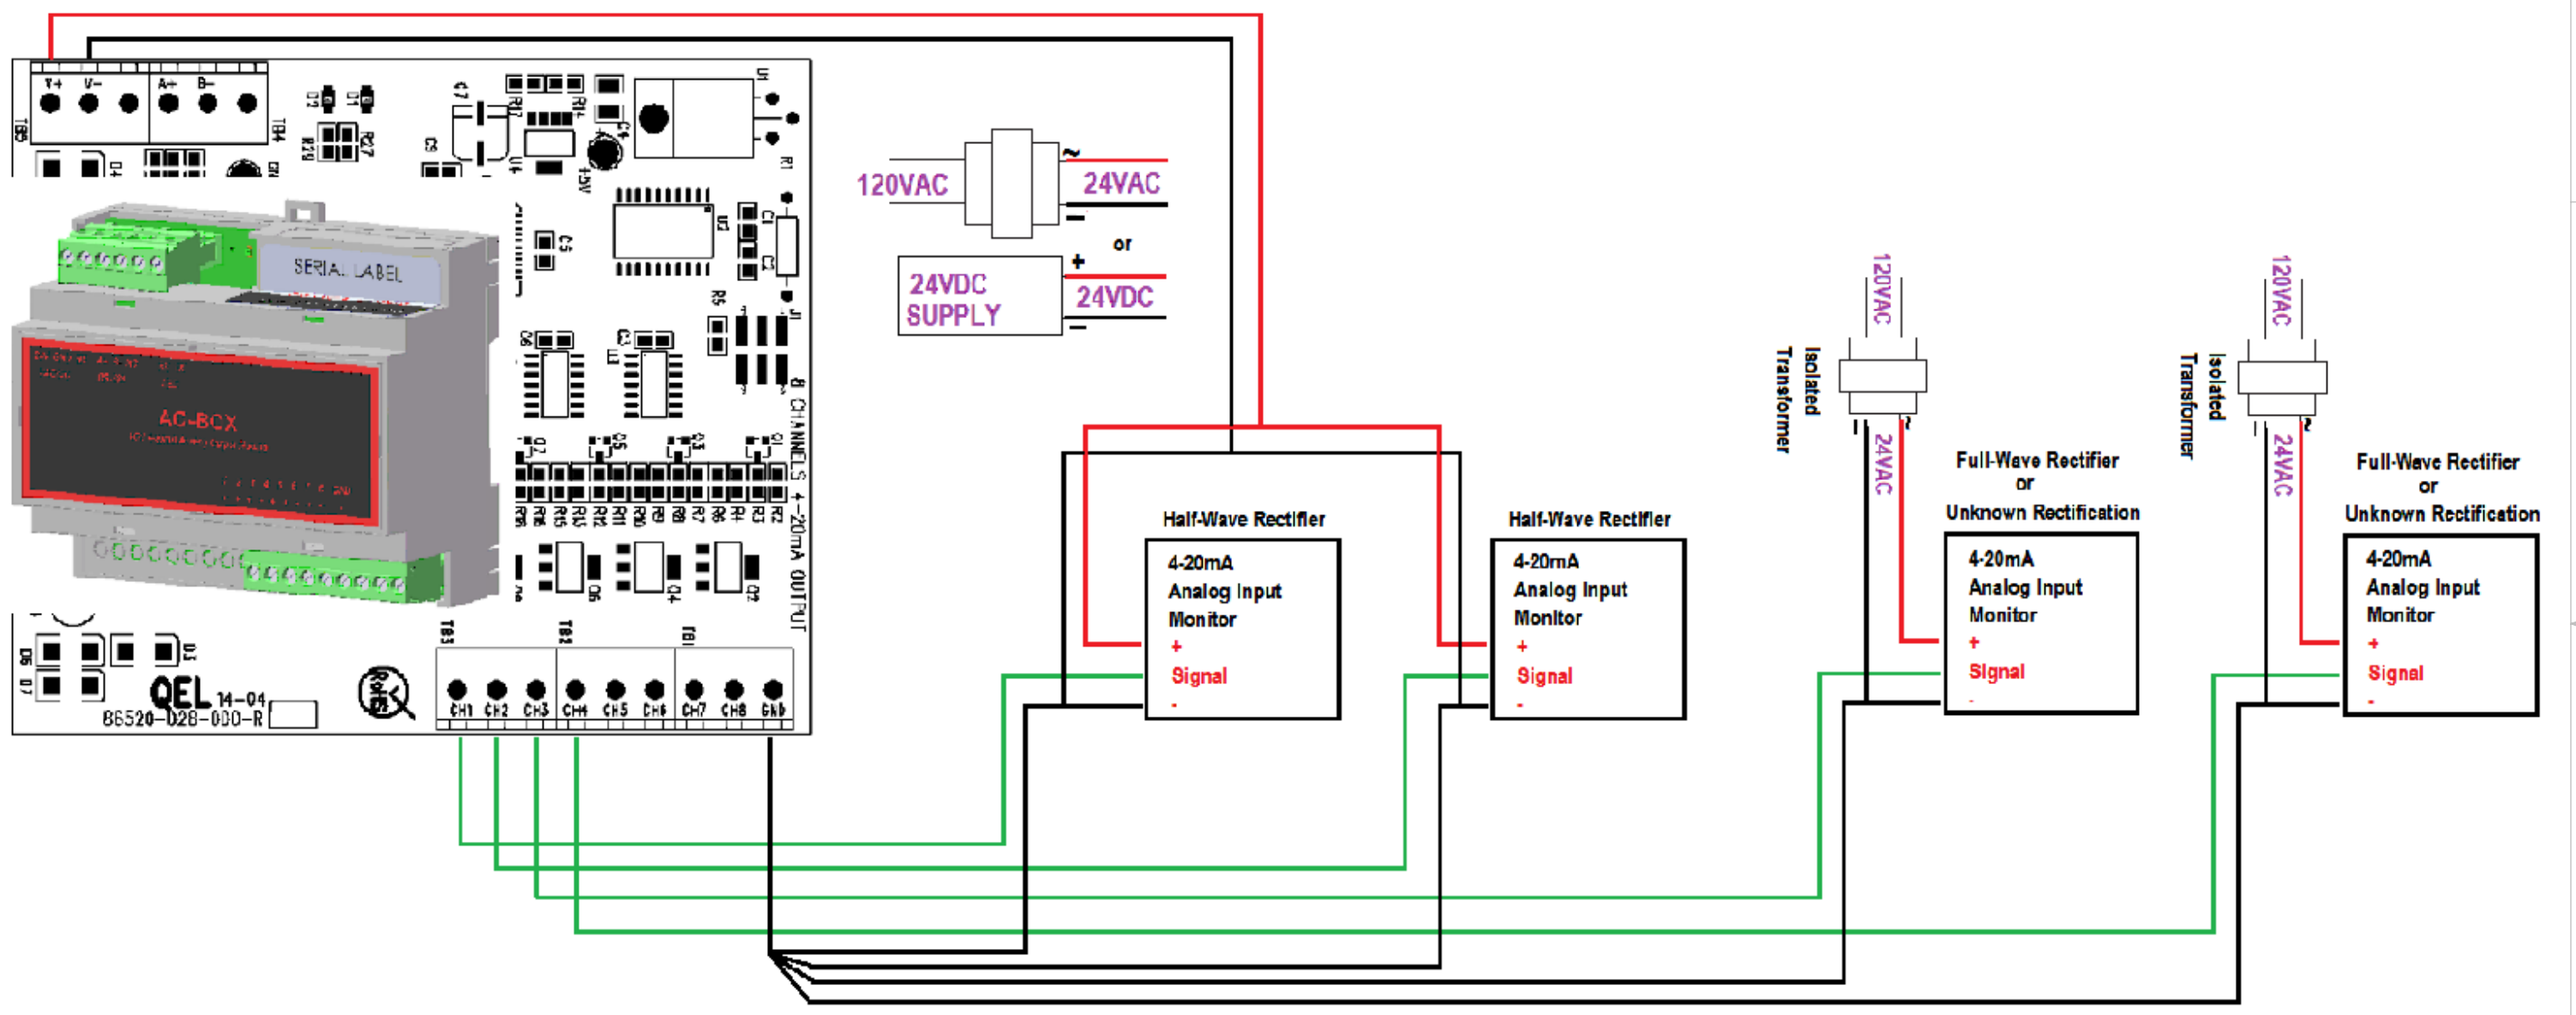

- NOTE for AI-Box and AO-Box:**
- All I/O boxes are non-isolated devices with a half-wave rectifier on the 24VAC/DC power input terminal. Therefore, to prevent equipment damage, multiple devices that are powered by a common 24VAC transformer must use common device power connections (e.g. 24VAC input power to other device power inputs, and ground to other device grounds), or dedicated isolated transformers must be provided for each non-isolated device.
 - The AI-Box 24VAC/DC input power ground and analog input signal returns are common.
 - The AO-Box 24VAC/DC input power ground and analog output signal returns are common.
 - If it is known that the connected analog device is half-wave rectified, it can share the same AC power supply with the AI-Box and AO-Box.
 - If the rectification of the other device is unknown, it is recommended that a separate transformer is used to power other device.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QUATROSENSE ENVIRONMENTAL LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF QUATROSENSE ENVIRONMENTAL LTD IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	Greystone Energy System Inc. TITLE: Q-Controller, GES Installation Drawing
DIMENSIONS ARE IN INCHES		DRAWN		
TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±		CHECKED		
INTERPRET GEOMETRIC TOLERANCING PER:		ENG APPR.		
MATERIAL		MFG APPR.		
NEXT ASSY	USED ON	Q.A.		SIZE DWG. NO. REV B 86550-002-005 A
APPLICATION	DO NOT SCALE DRAWING	COMMENTS:		
SCALE: 1:4 1			SHEET 7 OF 7	