


Slab Temperature Transmitter

Installation Instructions

INTRODUCTION

The single point slab temperature sensor utilizes a precision sensor encapsulated in a thermal conductive coating and used to measure the temperature of a concrete slab. It is available with various sensor types, wire types and lengths. All probes are constructed to provide excellent heat transfer, fast response, and resist moisture penetration. A compact ABS enclosure with a hinged and gasketed cover is provided for ease of installation.

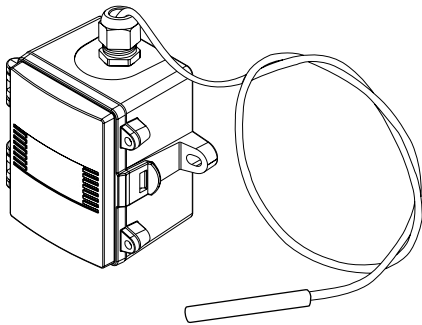

BEFORE INSTALLATION

Read these instructions carefully before installing and commissioning the temperature sensor. Failure to follow these instructions may result in product damage. Do not use in an explosive or hazardous environment, with combustible or flammable gases, as a safety or emergency stop device or in any other application where failure of the product could result in personal injury. **Do not exceed the device ratings.**

MOUNTING (DUCT)

ZW, FT & MP: Typically a predetermined area is defined where the temperature reading is required. During concrete installation a sufficient length of conduit or copper tubing is imbedded from this point to an area that will be accessible once complete. At the entrance to the sensor chamber, unravel the TSSL and carefully insert sensor and feed into chamber until the chamber end is reached.

A typical installation of this product is as follows: A predetermined area is defined where the temperature reading is required. During concrete installation a sufficient length of conduit or copper tubing is embedded from this point to an area that will be accessible once complete.

At the entrance to the sensor chamber, unravel the cable and carefully inset the sensor and feed it into the chamber until the chamber end is reached. See Figure 1.

MS: Unravel the sensor and lower the probe in the tank until below the liquid line or at desired depth. Secure cable to maintain depth. The probe may also be attached to the tank wall with some form of clamp at desired depth.

Once installed, complete the wiring instructions below.

The enclosure has a hinged cover with a latch. Open the cover by pulling slightly on the latch on the right side of the enclosure. At the same time pulling on the cover, as shown in Figure 3.

A 1/2" NPT threaded connection hole is provided in the bottom of the enclosure. Screw the EMT connector or cable gland connector in until tight. See Figure 4. It is recommended that weatherproof conduit or cable gland fittings be used. The E style enclosure includes a 1/2" NPT to M16 thread adapter and cable gland fitting.

Make wiring connections as per the "Wiring" illustrations on Page 2.

Swing door closed until securely latched. For added security, 2 screws are provided that may be installed in the integrated screw tabs. See Figure 5.

