




DUCT HUMIDITY/TEMPERATURE NETWORK SENSOR

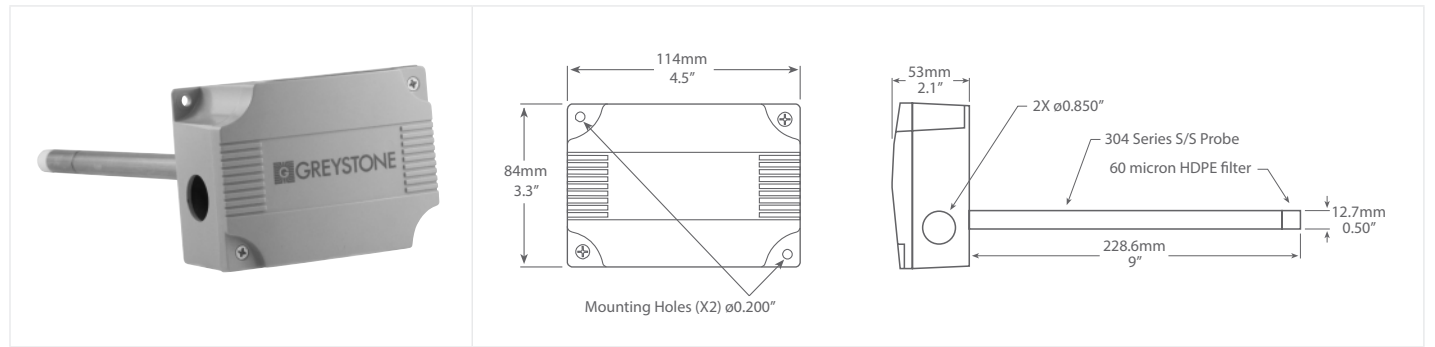

NTDA SERIES

PRODUCT DESCRIPTION

The NTDA Series duct RH/temperature network sensor uses a highly accurate and reliable Thermoset Polymer based capacitance humidity sensor and curve-matched NTC thermistor temperature sensor together with embedded BACnet® or Modbus communication to provide the most efficient monitoring and control solution.

The device connects to an RS-485 MS/TP network to offer a single-point solution for control of indoor air comfort.

The NTDA Series is provided in an ABS enclosure with a 230 mm (9") S/S probe with porous filter that allows for ease of installation and protection from the elements.


TYPICAL INSTALLATION

For complete installation and wiring details, please refer to the product installation instructions.

The duct type probes are installed through a hole in the side of the duct to monitor a single point humidity and temperature within the duct. Install the probe in a straight section of duct at a suitable distance downstream from any heating, cooling or humidification devices.

Mounting tabs on the outside of the enclosure for ease of installation.

A terminal block connection is provided for connection to the Building Automation System.



SPECIFICATIONS

POWER SUPPLY	BACnet®: 24 Vac/dc $\pm 10\%$ (non-isolated half-wave rectified) Modbus: 15 to 30 Vac/dc (non-isolated half-wave rectified)
CONSUMPTION	BACnet®: 25 mA max @ 24 Vdc Modbus: 10 mA max @ 24 Vdc
PROTECTION CIRCUITRY	Reverse voltage and over voltage protected
OPERATING CONDITIONS	-40 to 50°C (-40 to 122°F), 0-95 %RH, non-condensing
WIRING CONNECTIONS	Screw terminal block (14 to 22 AWG)
ENCLOSURE	ABS, UL94-5VB, IP61 (NEMA 2)
ENCLOSURE DIMENSIONS	114mm W x 84mm H x 53mm D (4.5" x 3.3" x 2.1")
PROBE	230mm (9") long x 12.7mm (0.5") diameter, Stainless steel porous filter
RELATIVE HUMIDITY	Sensing Element: Thermoset polymer based capacitive Accuracy: ± 2 %RH Range: 0 to 100 %RH Resolution: 0.1 %RH Hysteresis: ± 1.5 %RH Response Time: 15 seconds typical Stability: ± 1.2 %RH typical @ 50 %RH in 5 years
TEMPERATURE	Sensing Element: 20K Ω NTC Thermistor Accuracy: $\pm 0.2^\circ\text{C}$ ($\pm 0.4^\circ\text{F}$) curve matched Range: -40 to 50°C (-40 to 122°F) Resolution: 0.1° C/F
BACnet® COMMUNICATIONS INTERFACE	Hardware: 2-wire RS-485 Software: Native BACnet® MS/TP protocol Baud Rate: 9600, 19200, 38400 or 76800 Network Address Range: Locally set to 0-127
MODBUS COMMUNICATIONS INTERFACE	Hardware: 2-wire RS-485 Software: Native Modbus MS/TP protocol (RTU) Baud Rate: 4800, 9600, 19200, 38400 or 76800 (auto-detect) Network Address Range: Locally set to 1-255 Parity: None Stop Bits: 1 CRC: A001 (CRC-16 reverse)
COUNTRY OF ORIGIN	Canada

BACnet® COMMUNICATION



BACnet® is a data communication protocol for building automation and control networks. The sensor communicates on a standard 2-wire RS-485 MS/TP network designed to run at speeds from 9600 to 76800 baud over twisted pair wiring.

BACnet® is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of BACnet® listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet® International (BI). BTL is a registered trademark of BI.

MODBUS COMMUNICATION

Modbus is a network protocol for industrial manufacturing environments. The sensor communicates on a standard Modbus network using the RTU (Remote Terminal Unit) transmission mode. The hardware interface is RS-485.

WIRING INFORMATION

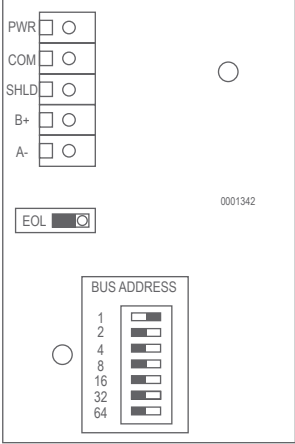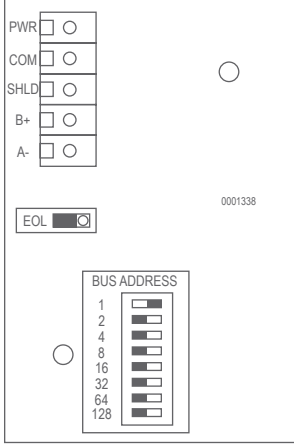	TERMINAL	FUNCTION	
	PWR COM SHLD B+ A-	24 Vac/dc of controller or power supply To GND or COMMON of controller To communications bus shield To + of communications bus To - of communications bus	
BACnet®			Modbus

ORDERING

PRODUCT	NTDA	Duct Humidity/Temperature Network Sensor
COMMUNICATIONS OUTPUT	BAC	BACnet®
	MOD	Modbus

NOTE: Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.

PART NUMBER

NTDA
