



GREYSTONE ENERGY SYSTEMS INC

OUTSIDE HUMIDITY /TEMPERATURE NETWORK SENSOR NTOA Series

The NTOA Series outside RH/temperature network sensor uses a highly accurate and reliable Thermoset Polymer based capacitance humidity sensor and curve-matched NTC thermistor temperature sensor together with embedded BACnet® or Modbus communication to provide the most efficient monitoring and control solution.

The device connects to an RS-485 MS/TP network to offer a single-point solution for control of indoor air comfort.

The NTOA Series is provided in a hinged, gasketed weather-proof ABS enclosure that allows for ease of installation and protection from the elements.



SPECIFICATION:

General Specifications:

Power Supply	BACnet®: 24 Vac/dc ± 10% (non-isolated half-wave rectified) Modbus: 15 - 30 Vac/dc (non-isolated half-wave rectified)
Consumption	BACnet®: 25 mA max @ 24 Vdc Modbus: 10 mA max @ 24 Vdc
Protection Circuitry.....	Reverse voltage and over voltage protected
Operation Conditions	-40 - 50 °C (-40 - 122 °F), 0-95% RH, non-condensing
Wiring Connections.....	Screw terminal block (14 to 22 AWG)
Enclosure	Grey ABS, UL94-5VB - IP65 (NEMA 4X)
Enclosure Dimensions	145 W x 100 H x 64 D mm (5.7" x 3.95" x 2.5")
Probe.....	20 mm (0.8") long x 28 mm (1.1") diameter PVC hub with mesh filter

Relative Humidity:

Sensing Element.....	Thermoset polymer based capacitive
Accuracy	± 2% RH
Range.....	0 - 100% RH
Resolution	0.1% RH
Hysteresis	± 1.5% RH
Response Time	15 seconds typical
Stability	± 1.2% RH typical @ 50% RH in 5 years

Temperature:

Sensing Element.....	20KΩ NTC thermistor
Accuracy	±0.2 °C (±0.4 °F) curve matched
Range.....	-40 - 50 °C (-40 - 122 °F)
Resolution.....	0.1 °C/°F

BACnet® Communications Interface:

Hardware	2-wire RS-485
Software.....	Native BACnet® MS/TP protocol
Baud Rate	9600, 19200, 38400 or 76800 Auto-detect
Network Address Range	Locally set to 0-127

Modbus Communications Interface:

Hardware	2-wire RS-485
Software.....	Native Modbus MS/TP protocol (RTU)
Baud Rate	4800, 9600, 19200, 38400 or 76800 Auto-detect
Network Address Range	Locally set to 1-255
Parity.....	None
Stop Bits.....	1
CRC	A001 (CRC-16 reverse)

PART NUMBER SELECTED

PRODUCT SELECTION INFORMATION:

MODEL	Product Description
NTOA	Outside Humidity/Temperature Network Sensor

CODE	Communications Output
BAC	BACnet®
MOD	Modbus

Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.

BACnet® COMMUNICATION

BACnet® is a data communication protocol for building automation and control networks. The sensor communicates on a standard 2-wire RS-485 MS/TP network designed to run at speeds from 9600 to 76800 baud over twisted pair wiring.

BACnet® is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of BACnet® listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet® International (BI). BTL is a registered trademark of BI.

MODBUS COMMUNICATION


Modbus is a network protocol for industrial manufacturing environments. The sensor communicates on a standard Modbus network using the RTU (Remote Terminal Unit) transmission mode. The hardware interface is RS-485.

TYPICAL INSTALLATION:


For complete installation and wiring details, please refer to the product installation instructions.

The NTOA should be mounted on an outside North facing wall, under the eaves which will provide protection from direct sunlight and wind.

The NTOA can be mounted directly to buildings wall face using the four provided mounting holes. There is a 0.85" hole for conduit connection.

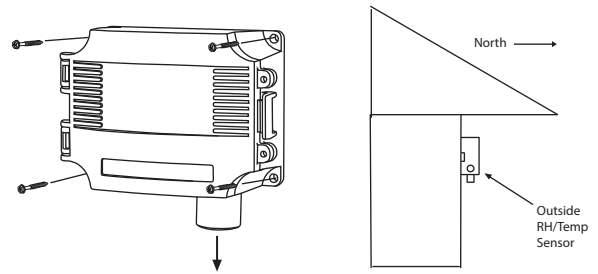

PCB/WIRING INFORMATION

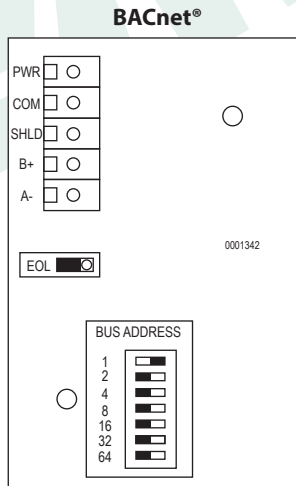


Terminal

PWR
COM
SHLD
B +
A -



Function

24 Vac/dc of controller or power supply
To GND or COMMON of controller
To communications bus shield
To + of communications bus
To - of communications bus

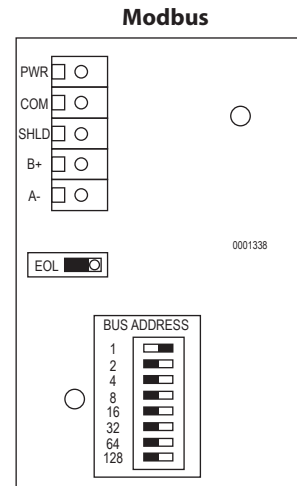

Modbus

DIMENSIONS:

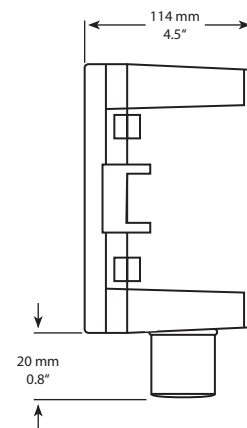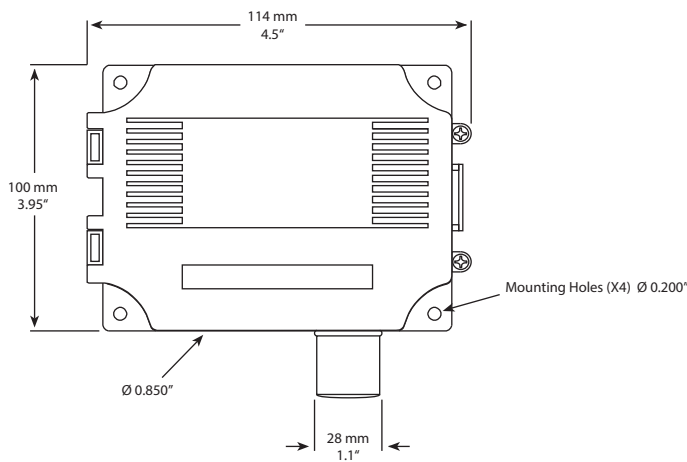

Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.



GREYSTONE
ENERGY SYSTEMS INC

Greystone Energy Systems, Inc.
150 English Drive, Moncton,
New Brunswick, Canada E1E 4G7
(506) 853-3057 Fax: (506) 853-6014
North America: 1-800-561-5611
e-mail: mail@greystoneenergy.com
www.greystoneenergy.com

RoHS
COMPLIANT



Greystone Energy Systems Inc. is one of North America's largest ISO registered manufacturers of HVAC/R sensors and transmitters for Building Automation Management Systems.

We have conscientiously established a worldwide reputation as an industry leader by maintaining leading-edge design technology, prompt technical support, and a commitment to on-time deliveries. We take pride in our Quality Management System which is ISO 9001 certified, assuring our customers of consistent product reliability.

GREYSTONE HAS AN ISO 9001 REGISTERED QUALITY SYSTEM