




The single point flying lead temperature transmitter incorporates a precision platinum RTD encapsulated in a 50.8 x 6 mm (2" x 0.236") OD, 304 stainless steel probe. The probe provides excellent heat transfer, fast response and resist moisture penetration. A transmitter that provides a high accuracy signal with excellent long term stability, low hysteresis and fast response for measurement of pipe temperatures. A weatherproof Polycarbonate enclosure is provided for ease of installation. An LCD is provided in either °C or °F.



SPECIFICATIONS:

Sensor Type:..... 1000 ohm platinum RTD
 Sensor Accuracy:..... ±0.3°C (±0.94°F) @ 0°C (32°F)
 Wire Material:..... FT-6 Plenum rated cable (22 AWG)
 Probe Sensing Range:..... -20 to 60°C (-4 to 140°F)
 Probe Material:..... 304 Series stainless steel
 Probe Dimensions:..... 50 mm (2") x 6.00 mm (0.236")
 Wire Length:..... 3.05m (10')
 Output Signal:..... 4-20 mA current loop, 0-5 vdc, or 0-10 vdc (factory configured)
 Transmitter Accuracy:..... ±0.2% of span, including linearity
 Power Supply:..... 15 to 30 Vdc, 12 to 28 Vac
 Consumption (max):..... 20 mA for current, 11 mA for voltage
 Protection Circuitry:..... Reverse voltage protected and output limited
 Output Drive @ 24 Vdc:..... **Current:** 700 ohms max
 Voltage: 20K ohms min
 LCD Display Units:..... °C or °F (factory configured)
 Display Range:..... 3 digit for -88.8 to 888 as required
 Display Size:..... 38.1mm W x 16.5 mm H (1.5" to 0.65")
 Digit Height:..... 11.4 mm (0.45") plus °C/°F symbol
 Ambient Operating Range:..... 0 to 50°C (32 to 122°F), 0-95 %RH
 Enclosure:..... Grey polycarbonate UL94-V0, IP65 (NEMA 4X)
 F style includes thread adapter (1/2" NPT to M16) cable gland fitting
 Wiring Connections:..... Screw terminal block (14 to 22 AWG)
 Country of Origin:..... Canada

PART NUMBER SELECTED

PRODUCT SELECTION INFORMATION:


MODEL	Product Description
TDFL	Flying Lead Temperature Transmitter with Display
CODE	Enclosure
B	Polycarbonate, with hinged & gasketed cover
F	Same as B, with thread adapter & cable gland fitting
CODE	Display Units
C	Celsius
F	Fahrenheit
CODE	Display Units
12X	1000 Ω, Platinum, 2 Wire, IEC 751, 385 thin film, Class B
CODE	Output
A	4-20 mA 2 or 3 wire
D	0-5 Vdc 3 wire
E	0-10 Vdc 3 wire
CODE	Scaled Range
001	0 to 35°C (32 to 95°F)
002	0 to 50°C (32 to 122°F)

TYPICAL INSTALLATION:


For complete installation and wiring details, please refer to the product installation instructions.

A typical application for the flying lead type probes is to monitor a single point temperature within the duct. Install the probe in a straight section of duct at a suitable distance downstream from any heating, cooling or humidification devices. Drill a 3/8 hole in the top of the duct and hang the sensor in the airstream.

The enclosure provides mounting tabs for ease of installation.





Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.



Wiring:

Terminal	Function
PWR	Power Supply
COM	Power Supply Common
TEMP (2)	Temperature Sensor Input
NO	Relay Output - Normally Open Contact
COM	Relay Common
NC	Relay Output - Normally Closed Contact


DIMENSIONS:

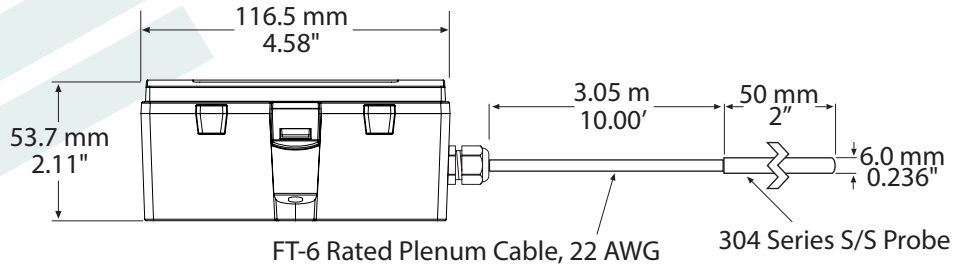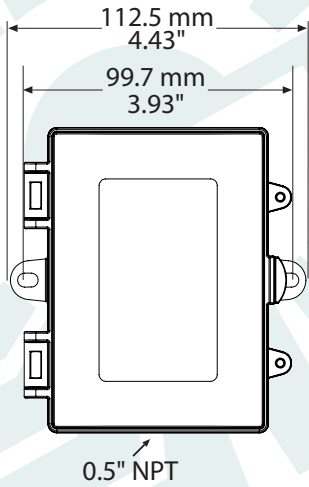

Included with F style enclosure

Thread Adapter

Cable Gland Fitting



GREYSTONE
ENERGY SYSTEMS INC

Greystone Energy Systems, Inc.
150 English Drive, Moncton,
New Brunswick, Canada E1E 4G7
(506) 853-3057 Fax: (506) 853-6014
North America: 1-800-561-5611
e-mail: mail@greystoneenergy.com
www.greystoneenergy.com

RoHS
COMPLIANT



Greystone Energy Systems Inc. is one of North America's largest ISO registered manufacturers of HVAC/R sensors and transmitters for Building Automation Management Systems.

We have conscientiously established a worldwide reputation as an industry leader by maintaining leading-edge design technology, prompt technical support, and a commitment to on-time deliveries. We take pride in our Quality Management System which is ISO 9001 certified, assuring our customers of consistent product reliability.

GREYSTONE HAS AN **ISO 9001** REGISTERED QUALITY SYSTEM