

FLEXIBLE CABLE DUCT AVERAGE NETWORK TEMPERATURE SENSOR TNDF Series

The flexible, multi point duct average network temperature sensor incorporates numerous precision sensors at equal distances across the FT-6 plenum rated cable and is available in various lengths (see ordering chart). All probes provide excellent heat transfer, fast response and resist moisture penetration. The transmitter provides a BACnet® or Modbus signal for network connection. A compact ABS enclosure with a hinged and gasketed cover is provided for ease of installation.



SPECIFICATION:

Power Supply **BACnet®:** 24 Vac/dc ±10% (non-isolated half-wave rectified)
Modbus: 24 Vac/dc ±20% (non-isolated half-wave rectified)
Consumption **BACnet®:** 25 mA max @ 24 Vdc
Modbus: 10 mA max @ 24 Vdc
Protection Circuitry..... Reverse voltage protected and over voltage protected
Operating Environment... -40 to 50°C (-40 to 122°F), 5 to 95 %RH non-condensing
Wire Material FT-6 plenum rated cable, 22AWG
Wiring Connections..... Screw terminal block (14 to 22 AWG)
Enclosure ABS - UL94-V0, IP65 (NEMA4X)
E style includes thread adapter (1/2" NPT to M16)
and cable gland fitting

Country of Origin..... Canada

Temperature

Sensing Element NTC thermistor
Accuracy ±0.2°C (±0.36°F) @ 0 to 70°C (32 to 158°F)
Probe Sensing Range..... -20 to 60°C (-4 to 140°F)
Resolution 0.1°C/°F

BACnet® Communications Interface

Hardware 2 wire RS-485
Software..... Native BACnet® MS/TP protocol
Baud Rate 9600, 19200, 38400, 57600, 76800, or 115200 (auto-detect)
Network Address Range.. Locally set to 0-127
Serial Configuration..... 8N1

Modbus Communications Interface

Hardware 2 wire RS-485
Software..... Native Modbus MS/TP protocol (RTU)
Baud Rate 9600, 19200, 38400, 57600, 76800, or 115200 (auto-detect)
Network Address Range.. Locally set to 1-255
Parity None
Stop Bits 1
Serial Configuration..... 8N1
Error Checking..... A001 (CRC-16 reverse)

PART NUMBER SELECTED

PRODUCT SELECTION INFORMATION:

MODEL	Product Description
TNDF	Flexible Cable Duct Average Network Temperature Sensor

CODE	Enclosure
A	ABS, with hinged & gasketed cover
E	Same as A, with thread adapter & cable gland fitting

CODE	Sensor
20	NTC Thermistor, ±0.2°C

CODE	Probe Length	No. of Sensor
I	1800mm (6')	4
J	3600mm (12')	4
K	6100mm (20')	4
L	7300mm (24')	9

CODE	Communication Output
B	BACnet®
M	Modbus


Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.

TYPICAL INSTALLATION:

For complete installation and wiring details, please refer to the product installation instructions.

The flex-duct average probes are installed through a hole in the side of the duct to monitor an average temperature within the duct. Select a probe length that allows for criss-crossing the duct multiple times. Install the probes in a straight section of duct at a suitable distance downstream from any heating, cooling or humidification devices.

The enclosure provides mounting tabs for ease of installation.



BACnet® COMMUNICATION


BACnet® is a data communication protocol for building automation and control networks. The sensor communicates on a standard 2-wire RS-485 MS/TP network designed to run at speeds from 9600 to 115200 baud over twisted pair wiring.

BACnet® is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of BACnet® listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet® International (BI). BTL is a registered trademark of BI.


MODBUS COMMUNICATION

Modbus is a network protocol for industrial manufacturing environments. The sensor communicates on a standard Modbus network using the RTU (Remote Terminal Unit) transmission mode. The hardware interface is RS-485.

DIMENSIONS:

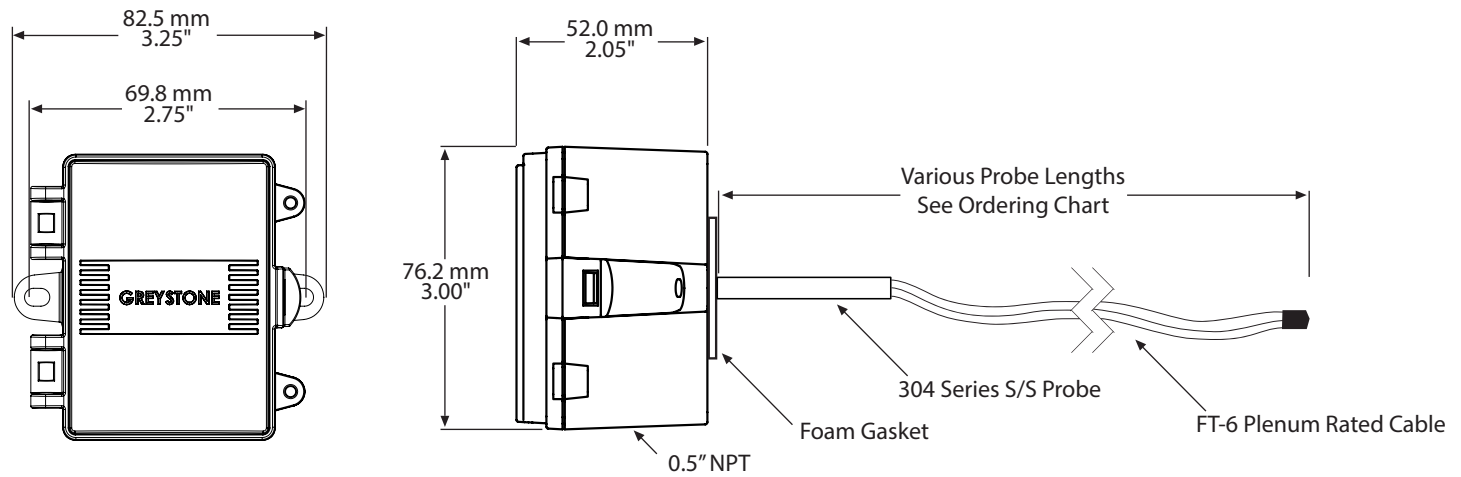

Included with E style enclosure



Cable Gland Fitting



GREYSTONE
ENERGY SYSTEMS INC

Greystone Energy Systems, Inc.
150 English Drive, Moncton,
New Brunswick, Canada E1E 4G7
(506) 853-3057 Fax: (506) 853-6014
North America: 1-800-561-5611
e-mail: mail@greystoneenergy.com
www.greystoneenergy.com

RoHS
COMPLIANT



Greystone Energy Systems Inc. is one of North America's largest ISO registered manufacturers of HVAC/R sensors and transmitters for Building Automation Management Systems.

We have conscientiously established a worldwide reputation as an industry leader by maintaining leading-edge design technology, prompt technical support, and a commitment to on-time deliveries. We take pride in our Quality Management System which is ISO 9001 certified, assuring our customers of consistent product reliability.

GREYSTONE HAS AN ISO 9001 REGISTERED QUALITY SYSTEM