




## DIFFERENTIAL PRESSURE FLOW SENSOR

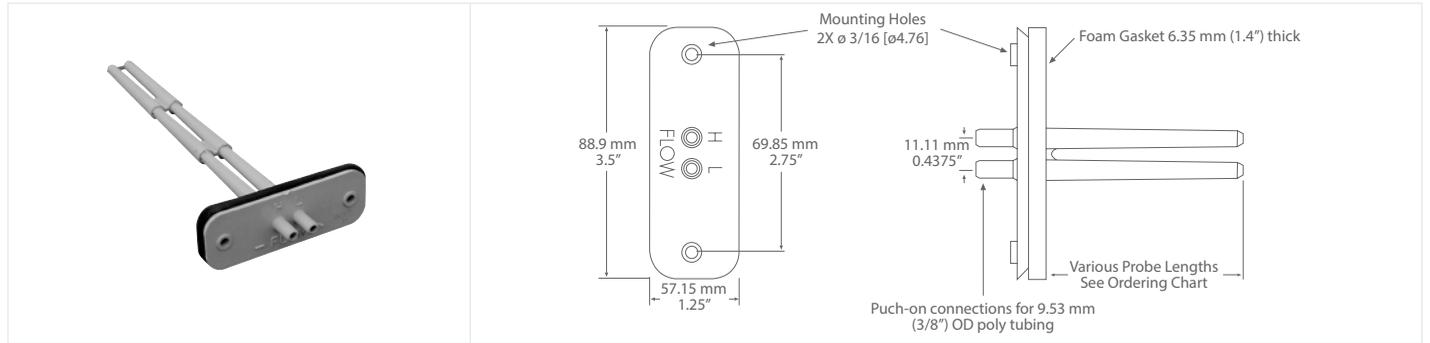

### DPFS SERIES

### PRODUCT DESCRIPTION

The DPFS sensors are designed to sense differential pressure in the inlet section of VAV (Variable Air Volume) terminal units and fan terminal units. They can also be used to sense differential pressure at other locations in the main or branch duct systems. The differential pressure read between the high "H" port and the low "L" port can be used to determine the air flow. Models offer up to nine sensing points and sensing lengths of 8.02 to 55.01 cm (3-5/32 to 21-21/32") to accommodate box size diameters of 10 to 76 cm (4 to 30").

### SPECIFICATIONS

MATERIAL	Light grey ABS/Polycarbonate, UL94-5V
MOUNTING	Integral flange with gasket
CONNECTION	6.35 mm (0/4") nipple for 9.5 mm (3/8") OD polyethylene tubing
OPERATING TEMPERATURE	4 to 49°C (40 to 120°F)
WEIGHT	28 grams (1 oz) 12" up - Welded Construction
APPROVALS	RoHS compliant
PROBE DIAMETER	6 mm (0.236")
COUNTRY OF ORIGIN	Canada

### TYPICAL INSTALLATION

For complete installation and wiring details, please refer to the product installation instructions.

1. Install the unit horizontally to assure accurate velocity readings for units ranging from 8.02 to 25.26 cm (3-5/32" to 9-29/32"). If using a unit longer than the DPFS5, which is 25.26 cm (9-29/32"), vertical mounting is recommended.
2. Determine the duct's flow direction and install the Series DPFS based on the unit's flow arrow imprint.
3. Cut a 2.25 cm (7/8") hole in the ducting to accept the unit.
4. Attach using two self-tapping screws inserted in the 4.75 mm (3/16") mounting holes.

The Series DPFS utilizes 6.35 mm (1/4") ID, 9.5 mm (3/8") OD tubing. First check that there are no sharp bends in the tubing at any connection. Bends and creases may leak overtime as the tubing ages. Connect the "H" Port to the high input on the differential pressure gage, transmitter, or switch. Connect the "L" Port to the low input on the differential pressure gage, transmitter, or switch. It may be necessary to calibrate in order to insure an accurate measurement. You can do this by completing a traverse of the duct or fan to determine the delta P sensed by the DPFS vs. the actual flow.

### ORDERING

PRODUCT	DPFS	Differential Pressure Flow Sensor
SENSOR	2	8.02 cm (3-5/32")
	4	19.55 cm (7-21/32")
	5	25.26 cm (9-29/32")
	6	31.75 cm (12-1/2")
	7	37.47 cm (14-3/4")
	8	43.50 cm (17-1/8")
	9	49.29 cm (19-13/32")
	10	55.01 cm (21-21/32")

### PART NUMBER

DPFS

NOTE: Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.



Greystone Energy Systems, Inc.  
150 English Drive, Moncton,  
New Brunswick, Canada E1E 4G7

Ph: +1 (506) 853-3057 Fax: +1(506) 853-6014  
North America: 1-800-561-5611  
E-mail: mail@greystoneenergy.com