GREYSTONE ENERGY SYSTEMS INC

TECHNICAL DATA SHEET **Q5 Series**

ANALOG TOXIC / COMBUSTIBLE GAS TRANSMITTER

The Q5 Series smart gas sensor/transmitters detect various toxic and combustible gases using different sensing technologies.
Key features include:

- **NEMA 4X enclosure** with an integral buzzer.
- **LCD display** for gas concentration and LED indicators for relays and communications.
- **Pre-calibrated sensors** that can be user-installed to reduce costs and downtime.
- **Menu-selectable screens** displaying relay status, time, TWA, STEL, and concentration data.
- **Non-proprietary programming and calibration** accessed via a password.
- **Stand-alone or networked installation** with RS-485 or Modbus communication.
- **Analog outputs** (4-20 mA, 2-10 VDC, 1-5 VDC) that are fully assignable.
- **User-programmable relays and buzzer** for various activation options.
- **Duct mount** , **splash guard** and **Flow through Calibration cap kits** available

This series offers flexibility, ease of use, and cost efficiency for gas detection applications.

SPECIFICATIONS

POWER SUPPLY	24 Vac (15-24 Vac); 24 Vdc (18-30Vdc)
FUSE	0.750A Polyswitch
SUPPLY CURRENT | POWER CONSUMPTION	Max 300mA | 7.2W
SENSING ELEMENT TECHNOLOGY	Combustible gases: Catalytic Toxic gases and Oxygen: Electrochemical Carbon Dioxide: Non-Dispersive Infra-Red (NDIR)
SENSOR LIFE	Electrochemical (Toxic): 2 to 3 Years, typical Oxygen/Hydrogen (Toxic): 18 months, typical Catalytic (Combustible): 3 to 5 Years, typical Infrared: >5 Years
ACCURACY	± 2.5% of reading
REPEATIBILITY	± 1% of reading
SHELF LIFE	Electrochemical (toxic) : 6 months from the date of purchase. Infrared: 1 year from date of purchase Catalytic (combuistible) : 1 Year from date of purchase
RESPONSE TIME	Less than 30 seconds for 90% step change
COVERAGE AREA	(see table of gas)
MOUNTING HEIGHT	(see table of gas)
FACTORY CALIBRATION RANGE	(see table of gas)
DISPLAY	LCD graphic display c/w backlight
PANEL CONTROL	Keypad: 3 Capacitive touch sensing keys: F1, F2, F3
PANEL INDICATOR	5 Status LED's RS-485 TX & RS-485 RX (Green) Relay 1, Relay 2, Relay 3 (Red)

Copyright © Greystone Energy Systems Inc. All Rights Reserved
Greystone Energy Systems, Inc.
321 Desbrisay Avenue, Moncton,
New Brunswick, Canada E1E 0J2
www.greystoneenergy.com

Ph: +1 (506) 853-3057 Fax: +1(506) 853-6014
North America: 1-800-561-5611
E-mail: mail@greystoneenergy.com

SPECIFICATIONS

WARM UP TIME	1 hour
RELAYS OUTPUTS	3 Relays SPDT (Form C), dry contacts 1.0 A maximum at 30 VDC (resistive load) 0.3 A maximum at 125 VAC (resistive load)
TIME DELAYS	Actuation (Make) or De-Actuation (Break) @ 0 - 999 seconds
RELAYS LIFE EXPECTANCY	Mechanical @ 50 million & Electrical @ 200,000 operations
ANALOG OUTPUTS	4-20mA , 2-10 VDC 1-5 VDC (linear, 3-wire)
DIGITAL OUTPUT	RS-485 Modbus RTU/OptoMux (Proprietary GES Controller Protocol) connects to Q4C Controller , M-Controller and Q-Controller
BAUD RATE	1200, 2400, 4800,9600, 14400, 19200, 28800, 38400, 57600, 76800 Bits/Second (Default: 4800 BPS)
BUZZER	80 db at 10 cm, 2700 Hz Buzzer with 3 programmable tones
OPERATING TEMPERATURE	(see table of gas)
STORAGE TEMPERATURE	Storage: 0 to 40°C (32 to 104°F), depends on sensor specification
OPERATING HUMIDITY	5% to 95% RH non condensing
OPERATING PRESSURE	Atmospheric +/-10%
ENCLOSURE	Plastic Enclosure ,Polycarbonate Lexan, Fire retardant UL94 V-0 IP 66 & NEMA 4, 4X, 12 & 13
WIRING	12 AWG to 24 AWG for Screw Terminals Blocks(De -Pluggable)
CABLE SPECIFICATION	BELDEN 9841 or equivalent ,120 ohms Input
DIMENSIONS	150 mm x 90 mm x 65 mm (5.91"x 3.54" x 2.56")
WEIGHT	LESS THAN 0.23kg (0.5lbs)

Ensure a complete understanding of all applicable Federal, State, Provincial and Local Health and Safety laws and regulations before using these products.

DIMENSIONS

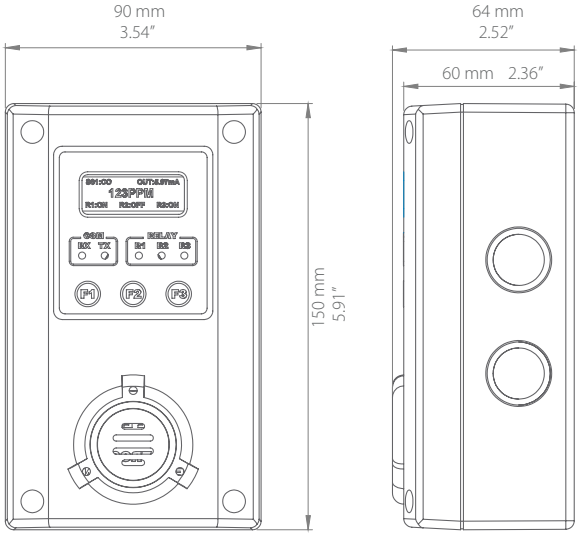

Copyright © Greystone Energy Systems Inc. All Rights Reserved
Greystone Energy Systems, Inc.
321 Desbrisay Avenue, Moncton,
New Brunswick, Canada E1E 0J2

Ph: +1 (506) 853-3057 Fax: +1(506) 853-6014
North America: 1-800-561-5611
E-mail: mail@greystoneenergy.com

WIRING INFORMATION

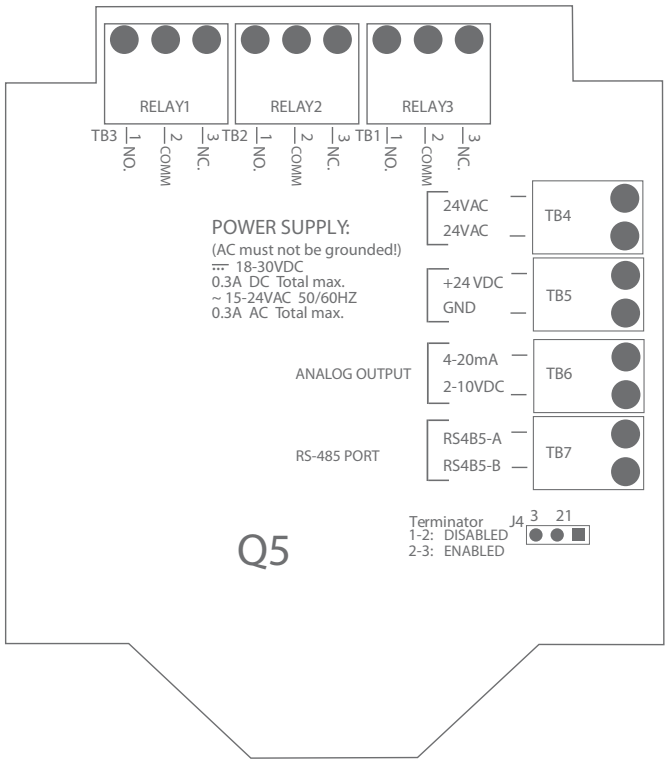

TERMINAL		FUNCTION
TB1 TB2 TB3	NC: Normally Close COM: Common NO: Normally Open	3 x Relays Outputs
TB4	24VAC	Power IN VAC
TB5	24VDC	Power IN VDC
TB6	4-20mA 2-10VDC	Analog Output
TB7	A+ B-	1x RS-485 Port

ORDERING

Q5	C3H6O-100L	-0	-A	-G
Product Series	Gas Ordering Code (See Gas Table for other Gas Code)	Standard Enclosure	Revision	Greystone Product

ACCESSORIES	DESCRIPTION	PART NUMBERS
DUCT MOUNT	Mounting kit for duct installation	85930-040-000
SPLASH GUARD	Unit cover for wet application application	85930-007-000
PUMP-THRU / CAL CAP	Kit for gas calibration (please refer to manual)	85930-006-000

Copyright © Greystone Energy Systems Inc. All Rights Reserved

Greystone Energy Systems, Inc.
321 Desbrisay Avenue, Moncton,
New Brunswick, Canada E1E 0J2

Ph: +1 (506) 853-3057 Fax: +1(506) 853-6014
North America: 1-800-561-5611
E-mail: mail@greystoneenergy.com

GAS TYPE		SPAN RANGE	ORDERING CODE	SENSING TECHNOLOY	AREA FT2 (M2)	RADIUS FT (M)	MOUNTING HEIGHT	OPERATING TEMPERATURE F (C)
Acetone	C3H6O	0-100%LEL	C3H6O-100L	Catalytic Bead	5000 (464.5)	40 (12.2)	Low	-22 to 122 (-30 to 50)
Ammonia	NH3	0-100ppm	NH3-100P	Electrochemical	7500 (696.7)	49 (14.9)	High	-22 to 122 (-30 to 50)
Ammonia	NH3	0-1000ppm	NH3-1000P	Electrochemical	7500 (696.7)	49 (14.9)	High	-22 to 122 (-30 to 50)
Arsine	ASH3	0-1ppm	ASH3-1P	Electrochemical	5000 (464.5)	40 (12.2)	Low	-4 to 104 (-20 to 40)
Benzene	C6H6	0-100% LEL	C6H6-100L	Catalytic Bead	5000 (464.5)	40 (12.2)	Low	-22 to 122 (-30 to 50)
Iso-Butane	C4H10	0-100% LEL	C4H10-100L	Catalytic Bead	5000 (464.5)	40 (12.2)	Low	-22 to 122 (-30 to 50)
Butanol n-Butane	BUTAN	0-100% LEL	BUTAN-100L	Catalytic Bead	5000 (464.5)	40 (12.2)	Low	-22 to 122 (-30 to 50)
Carbon Dioxide	CO2	0-5000ppm	CO2-5000P	Infrared	7500 (696.7)	49 (14.9)	Mid	- 4 to 122 (- 20 to 50)
Carbon Dioxide	CO2	0-5% VOL	CO2-5V	Infrared	7500 (696.7)	49 (14.9)	Mid	- 4 to 122 (- 20 to 50)
Carbon Dioxide	CO2	0-20% VOL	CO2-20V	Infrared	7500 (696.7)	49 (14.9)	Mid	- 4 to 122 (- 20 to 50)
Carbon Dioxide	CO2	0-100% VOL	CO2-100V	Infrared	7500 (696.7)	49 (14.9)	Mid	- 4 to 122 (- 20 to 50)
Chlorine	Cl2	0-5PPM	Cl2-5P	Electrochemical	5000 (464.5)	40 (12.2)	Low	- 4 to 122 (- 20 to 50)
Chlorine Dioxyde	ClO2	0-2PPM	ClO2-2P	Electrochemical	5000 (464.5)	40 (12.2)	Low	- 4 to 122 (- 20 to 50)
Combustibles* **	GENL	0-100%LEL	GENL-100L	Catalytic Bead	5000 (464.5)	40 (12.2)	Gas Dependent	-22 to 122 (-30 to 50)
Diborane	B2H6	0-2 PPM	B2H6-2P	Electrochemical	5000 (464.5)	40 (12.2)	Mid	- 4 to 104 (- 20 to 40)
Ethylene	C2H4	0-100%LEL	C2H4-100L	Catalytic Bead	5000 (464.5)	40 (12.2)	Mid	14 to 122(-10 to 50)
Ethylene Oxide	ETO	0-20PPM	ETO-20P	Electrochemical	5000 (464.5)	40 (12.2)	Low	- 4 to 122 (- 20 to 50)
Germane	GeH4	0-2PPM	GeH4-2P	Electrochemical	5000 (464.5)	40 (12.2)	Low	- 4 to 104 (- 20 to 40)
Hydrogen	H2	0-1000PPM	H2-1000P	Electrochemical	7500 (696.7)	49 (14.9)	High	- 4 to 122 (- 20 to 50)
Hydrogen	H2	0-2000PPM	H2-2000P	Electrochemical	7500 (696.7)	49 (14.9)	High	- 4 to 122 (- 20 to 50)
Hydrogen	H2	0-100% LEL	H2-100L	Catalytic Bead	7500 (696.7)	49 (14.9)	High	14 to 122(-10 to 50)
Hydrogen Bromide	HBR	0-30PPM	HBR-30P	Electrochemical	5000 (464.5)	40 (12.2)	Low	-22 to 122 (-30 to 50)
Hydrogen Chloride	HCl	0-30PPM	HCl-30P	Electrochemical	5000 (464.5)	40 (12.2)	Mid	- 4 to 122 (- 20 to 50)
Hydrogen Cyanide	HCN	0-50PPM	HCN-50P	Electrochemical	5000 (464.5)	40 (12.2)	Mid	- 4 to 122 (- 20 to 50)
Hydrogen Sulphide	H2S	0-25PPM	H2S-25P	Electrochemical	5000 (464.5)	40 (12.2)	Low	- 4 to 122 (- 20 to 50)
Hydrogen Sulphide	H2S	0-100PPM	H2S-100P	Electrochemical	5000 (464.5)	40 (12.2)	Low	-4 to 122 (-20 to 50)
Methane	CH4	0-100%LEL	CH4-100L	Catalytic Bead	7500 (696.7)	49 (14.9)	High	-22 to 122 (-30 to 50)
Methanol	CH3OH	0-100%LEL	CH3OH-100L	Catalytic Bead	5000 (464.5)	40 (12.2)	Low	-22 to 122 (-30 to 50)
Nitric Oxide	NO	0-100PPM	NO-100P	Electrochemical	7500 (696.7)	49 (14.9)	Mid	- 4 to 122 (- 20 to 50)
Nitrogen Dioxide	NO2	0-10ppm	NO2-10P	Electrochemical	7500 (696.7)	49 (14.9)	Low	- 4 to 122 (- 20 to 50)
Oxygen	O2	0-25% VOL	O2-25V	Electrochemical	7500 (696.7)	49 (14.9)	Mid	-22 to 122 (-30 to 50)
Ozone	O3	0-1PPM	O3-1P	Electrochemical	5000 (464.5)	40 (12.2)	Mid	- 4 to 122 (- 20 to 50)
Iso-Pentane	C5H12	0-100%LEL	C5H12-100L	Catalytic Bead	5000 (464.5)	40 (12.2)	Low	-22 to 122 (-30 to 50)
Phosphine	PH3	0-1PPM	PH3-1P	Electrochemical	5000 (464.5)	40 (12.2)	Low	- 4 to 122 (- 20 to 50)
Phosphine	PH3	0-5PPM	PH3-5P	Electrochemical	5000 (464.5)	40 (12.2)	Low	- 4 to 122 (- 20 to 50)
Propane	C3H8	0-100%LEL	C3H8-100L	Catalytic Bead	7500 (696.7)	49 (14.9)	Low	-22 to 122 (-30 to 50)
Silane	SiH4	0-50PPM	SiH4-50P	Electrochemical.	5000 (464.5)	40 (12.2)	Mid	- 4 to 122 (- 20 to 50)
Sulphur Dioxide	SO2	0-6PPM	SO2-6P	Electrochemical	5000 (464.5)	40 (12.2)	Low	- 4 to 122 (- 20 to 50)
Sulphur Hexafluoride	SF6	0-1000PPM	SF6-1000P	Infrared	5000 (464.5)	40 (12.2)	Low	- 4 to 122 (- 20 to 50)

***Low** = 0.5 to 1.5' (0.15 to 0.46m) above floor

***Mid** = 4.0 to 6.0'(1.20to 1.83m) above floor

***High** = 0.5 to 1.5' (0.15 to 0.46m) below ceiling

**** Available Gases under GENL Code: Diesel, Ethanol, Acetone, Methanol, Jet Fuel, Kerosene, Propylene, IPA, etc. For other gases, please contact Greystone Energy Systems Inc.

Copyright © Greystone Energy Systems Inc. All Rights Reserved

Greystone Energy Systems, Inc.
321 Desbrisay Avenue, Moncton,
New Brunswick, Canada E1E 0J2

Ph: +1 (506) 853-3057 Fax: +1(506) 853-6014
North America: 1-800-561-5611
E-mail: mail@greystoneenergy.com