



HIGH ACCURACY DUCT TEMPERATURE TRANSMITTER HATXBM Series

The HATXBM single point duct temperature transmitter incorporates a high accuracy platinum RTD encapsulated in a 6.35 mm (0.25") OD, 304 stainless steel probe and is available in various lengths. All probes provide excellent heat transfer, fast response and resist moisture penetration. A transmitter that provides a high accuracy signal with excellent long term stability, low hysteresis and fast response is provided.



SPECIFICATION:

Sensor..... 1000 ohm Platinum RTD
 Accuracy..... **RTD Class A:** $\pm 0.15^{\circ}\text{C}$ @ 0°C
RTD 1/3 DIN: $\pm 0.1^{\circ}\text{C}$ @ 0°C
RTD 1/10 DIN: $\pm 0.03^{\circ}\text{C}$ @ 0°C

Probe Sensing Range..... -20 to 105°C (-4 to 221°F)
 Wire Material..... 2 Wire - PVC insulated, parallel bonded
 3 Wire - FT4

Probe Material..... 304 Series Stainless Steel
 Probe Dimension..... 6.35 mm (0.25") Diameter
 Output Signal..... 4-20mA current loop, 0-5 Vdc, or 0-10 Vdc (factory configured)

Transmitter Accuracy..... $\pm 0.125\%$ of span, including linearity

4-20 mA loop power Supply..... 15-35 Vdc or 22-32 Vac
 Minimum Current Loop..... 2 mA nominal (occurs with shorted sensor)
 Maximum loop Current..... 22.5 mA nominal (occurs with open sensor)

Maximum Loop Load..... >600 ohms
 0-5 Vdc Power Supply..... 10-35 Vdc or 10-32 Vac
 0-10 Vdc Power Supply..... 15-35 Vdc or 15-32 Vac
 Maximum Current (Voltage)..... 5 mA nominal
 Maximum Output (Voltage)..... limited to 5.5 Vdc for 0-5 Vdc, 10.5 for 0-10 Vdc

Input Voltage Effect..... Negligible over specified operating range

RFI rejection..... Good RFI rejection of normal frequencies

Protection Circuitry..... Reverse voltage protected and output limited

Adjustment..... Internal ZERO and SPAN pots*
 Ambient Operating Range..... $-40 - 85^{\circ}\text{C}$ (-40 - 185°F), 0-95% RH non-condensing

Enclosure..... (E)-ABS, UL94-5VB, IP65 (NEMA 4X)
 (P)- PVC, IP65 (NEMA 4X)

Wiring Connections..... Screw terminal block (14 to 22 AWG)

PART NUMBER SELECTED

PRODUCT SELECTION INFORMATION:

MODEL	Product Description
HATXBM	High Accuracy Duct Temperature Transmitter

CODE	Enclosure
E	Round ABS with gasket cover
P	PVC Weatherproof

CODE	Sensor
18	1000 Ω Platinum, 2 wire, IEC 751, 385 Alpha, thin film, Class A
48	1000 Ω Platinum, 2 wire, IEC 751, 385 Alpha, thin film, 1/3 DIN
22	1000 Ω Platinum, 2 wire IEC 751, 385 Alpha, thin film, 1/10 DIN
41	1000 Ω Platinum, 3 wire, IEC 751, 385 Alpha, thin film, Class A
49	1000 Ω Platinum, 3 wire, IEC 751, 385 Alpha, thin film, 1/3 DIN
50	1000 Ω Platinum, 3 wire, IEC 751, 385 Alpha, thin film, 1/10 DIN

CODE	Probe Length
A	50 mm (2")
B	100 mm (4")
C	150 mm (6")
D	200 mm (8")
E	300 mm (12")
F	450 mm (18")

CODE	Output
A	4-20 mA
D	0-5 Vdc
E	0-10 Vdc

CODE	Output
1	0-35 $^{\circ}\text{C}$ (32-95 $^{\circ}\text{F}$)
2	0-50 $^{\circ}\text{C}$ (32-122 $^{\circ}\text{F}$)
3	0-100 $^{\circ}\text{C}$ (32-212 $^{\circ}\text{F}$)
6	-50-50 $^{\circ}\text{C}$ (-58-122 $^{\circ}\text{F}$)
*	Custom Ranges Available


*CUSTOM SCALED TEMPERATURE RANGE

TYPICAL INSTALLATION:

For complete installation and wiring details, please refer to the product installation instructions.



The duct type probes are installed through a hole in the side of the duct to monitor a single point temperature within the duct. Since the probes are tip sensitive, select a probe length that places the sensor well into the duct. Install the probe in a straight section of duct at a suitable distance downstream from any heating, cooling or humidification devices.

Each enclosure style provides mounting tabs or holes for ease of installation.





DIMENSIONS:

Round ABS Enclosure (E)

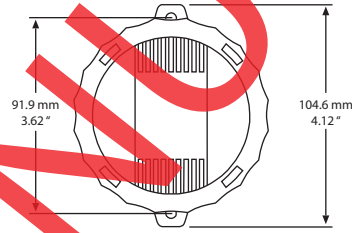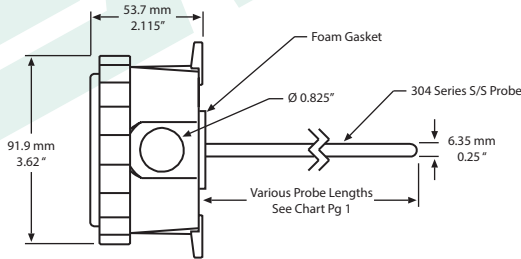

PVC Enclosure (P)

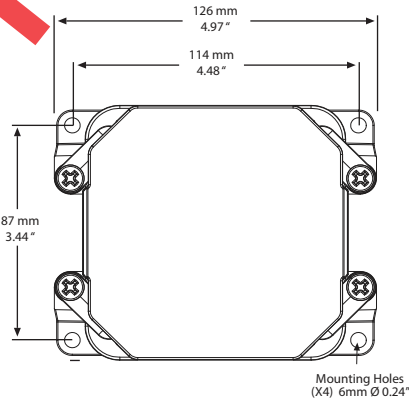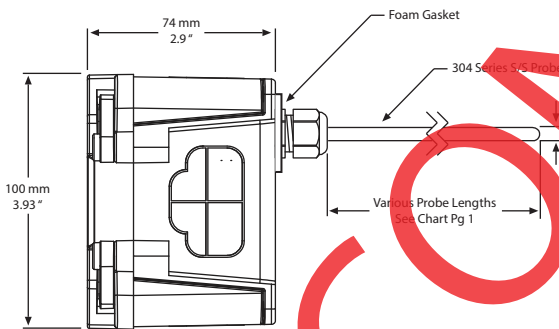

Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.
 *This product is factory calibrated and any field adjustment will void the warranty.



Greystone Energy Systems, Inc.
 150 English Drive, Moncton,
 New Brunswick, Canada E1E 4G7
 (506) 853-3057 Fax: (506) 853-6014
 North America: 1-800-561-5611
 e-mail: mail@greystoneenergy.com
 www.greystoneenergy.com



Greystone Energy Systems Inc. is one of North America's largest ISO registered manufacturers of HVAC/R sensors and transmitters for Building Automation Management Systems. We have conscientiously established a worldwide reputation as an industry leader by maintaining leading-edge design technology, prompt technical support, and a commitment to on-time deliveries. We take pride in our Quality Management System which is ISO 9001 certified, assuring our customers of consistent product reliability.

GREYSTONE HAS AN ISO 9001 REGISTERED QUALITY SYSTEM