



## LOW LIMIT STRAP-ON TEMPERATURE TTLRP Series

The TTLRP single point strap-on temperature thermostat incorporates a precision thermistor temperature sensor and provides a Form C relay output (NO/NC) with an adjustable setpoint. The sensor is encapsulated in a 6.35 mm (0.25") OD, 304 stainless steel probe and is available in various lengths (see ordering chart). Standard wire length is 5' (1.5 m). All probes are constructed to provide excellent heat transfer, fast response and are potted to resist moisture penetration. Two enclosure styles are available.

### SPECIFICATION:

Power Supply ..... 12 to 28 Vac/dc  
Consumption ..... 50 mA max  
Relay Contacts ..... SPDT, Form C contacts (N.O. and N.C.)  
5 Amps @ 30 Vdc/250 Vac resistive  
1.5 Amps @ 30 Vdc/250 Vac inductive  
Relay Action ..... Activates on temperature fall  
Setpoint Operation ..... Single-turn knob-pot on pcb  
Adjustable Setpoint ..... -4 to 10°C (25 to 50°F)  
Setpoint Temperature ..... Low/Mid/High jumper selectable  
Differential ..... 1.1/2.8/5.6 °C (2/5/10 °F)  
Temperature Sensor ..... 10K ohm curve matched  
precision thermistor  
Sensor Accuracy ..... ±0.2°C, 0 to 70°C (±0.36°F, 32 to 158°F)  
Probe Sensing Range ..... -20 to 105 °C (-4 to 221 °F)  
Probe Material ..... 304 Series Stainless Steel  
Probe Dimensions ..... 6.35 mm (0.25") Diameter  
Wire Material ..... PVC insulated, parallel bonded  
Wire Length ..... 1.524 m (5')  
Operating Conditions ..... -10 to 50 °C (14 to 122°F),  
5 to 95% RH non-condensing  
Storage Conditions ..... -30 to 70 °C (-22 to 158°F),  
5 to 95%RH non-condensing  
Enclosure ..... (A) ABS, UL94-5VB, IP61 (NEMA 2)  
(D)-ABS, UL94-5VB, IP65 (NEMA 4X)  
Wiring Connections ..... Screw terminal block  
(14 to 22 AWG)

### WIRING:

Terminal	Function
PWR	Power Supply
COM	Power Supply Common
TEMP (2)	Temperature Sensor Input
NO	Relay Output - Normally Open Contact
COM	Relay Common
NC	Relay Output - Normally Closed Contact



### PART NUMBER SELECTED


### PRODUCT SELECTION INFORMATION:

MODEL	Product Description
TTLRP	Low Limit Strap-On Temperature Thermostat

CODE	Enclosure
A24	ABS Enclosure
D24	ABS Enclosure, Hinged Cover

CODE	Probe Length
A	50 mm (2")
B	100 mm (4")
C	150 mm (6")
D	200 mm (8")

CODE	Adjustable Setpoint Range
1	-4 - 10°C (25 - 50°F)




## TYPICAL INSTALLATION:

For complete installation and wiring details, please refer to the product installation instructions.


For best results, thermal conductive compound should be applied to pipe prior to mounting the probe.

Find a suitable location along the pipe where both the probe and remote enclosure can be mounted. If necessary, remove a section of insulation from pipe. Position probe directly on the pipe and secure using a pipe clamp. For added security, make 1-3 loops of the sensor cable around the pipe and feed through wire hole on the enclosure and secure using the supplied grommet. If necessary, the pipe insulation can be re-applied to the pipe over the probe.

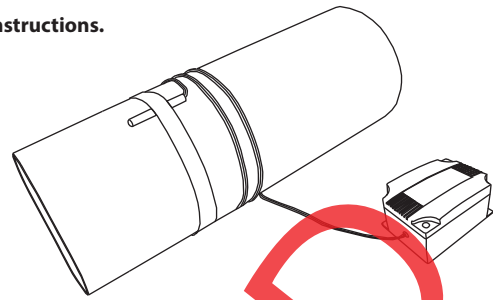


## DIMENSIONS:

### ABS Enclosure (A)

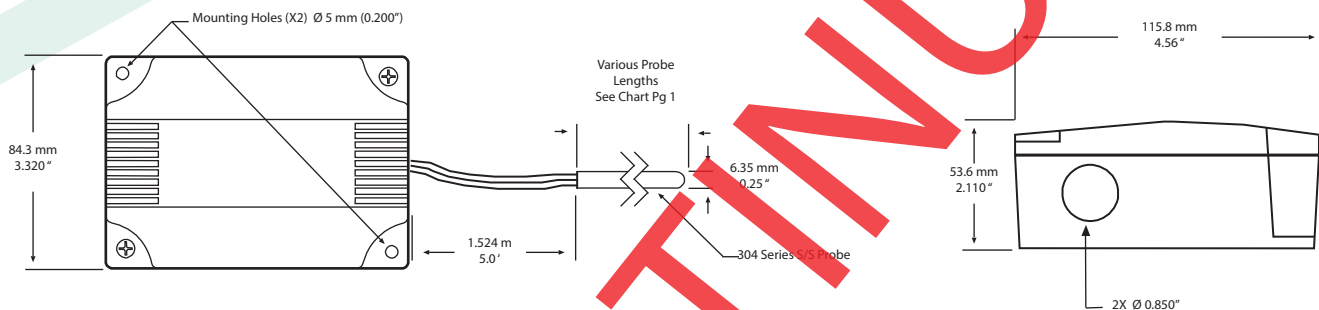

### Hinged ABS Enclosure (D)

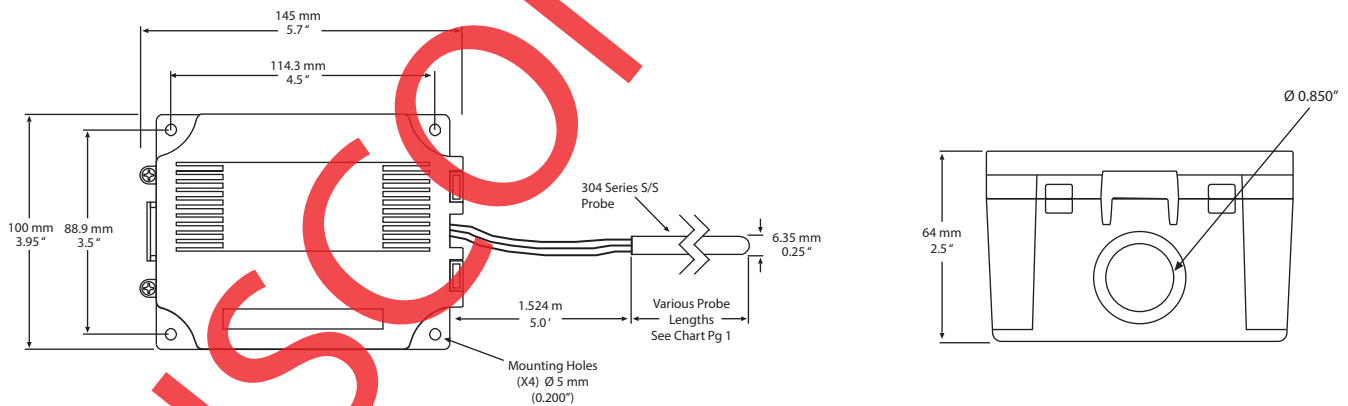

Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.



**GREYSTONE**  
ENERGY SYSTEMS INC

Greystone Energy Systems, Inc.  
150 English Drive, Moncton,  
New Brunswick, Canada E1E 4G7  
(506) 853-3057 Fax: (506) 853-6014  
North America: 1-800-561-5611  
e-mail: mail@greystoneenergy.com  
www.greystoneenergy.com

**RoHS**  
COMPLIANT



*Greystone Energy Systems Inc. is one of North America's largest ISO registered manufacturers of HVAC/R sensors and transmitters for Building Automation Management Systems.*

*We have conscientiously established a worldwide reputation as an industry leader by maintaining leading-edge design technology, prompt technical support, and a commitment to on-time deliveries. We take pride in our Quality Management System which is ISO 9001 certified, assuring our customers of consistent product reliability.*

GREYSTONE HAS AN **ISO 9001** REGISTERED QUALITY SYSTEM